
AKUSTUS DESIGNS UNFO@AKUSTUS.COM AKUSTUS.COM AKUSTUS.COM

# **Pebbles Wall Panels**




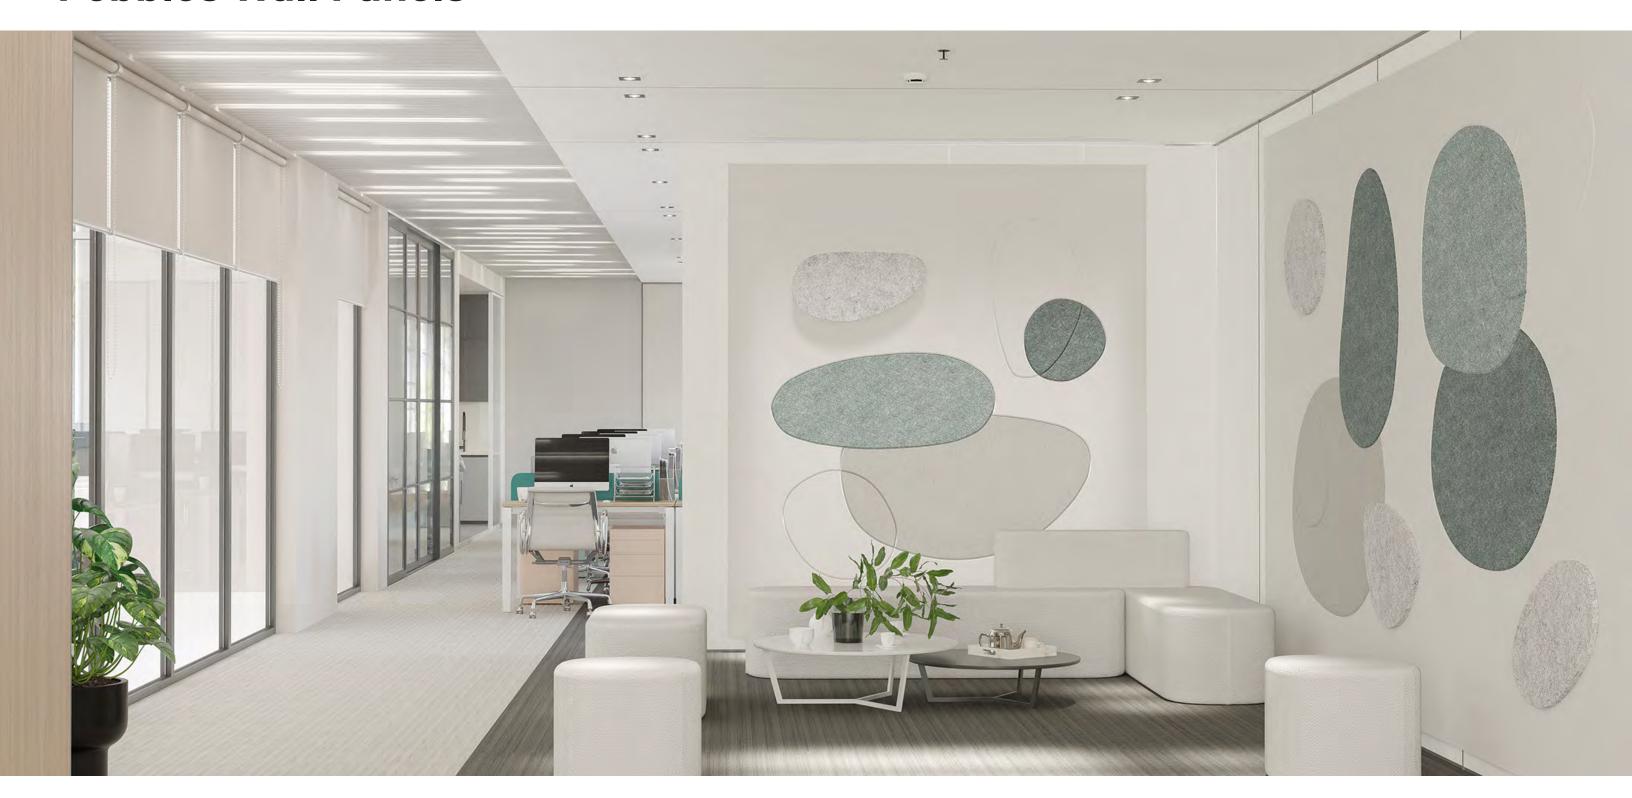


Pebbles come in many different shapes, colours and sizes. But no matter how they look, rest assured that Pebbles Wall Panels will deal with unnecessary reverb in the room.

# **How to Specify**


Step by step instructions on how to specify Pebbles Wall Panels.



01 Choose one of our configurations. (pg 03-07)



02 Choose colour. (pg 08)



03 **Choose installation** method. (pg 09)

## **Dimensions**

Standard Dimensions (mm)

1220 W x 2745 H

Standard Thickness (mm)

12


**Edge Detail** 



Square Edge

### Customization

Width and Height can be customized to fit your space.

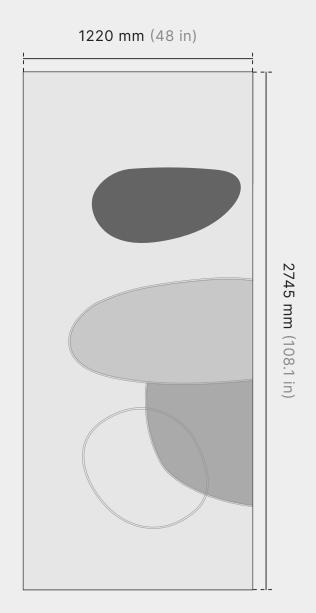


PEBBLES WALL PANELS AKUSTUS.COM


# Configurations

Choose from 5 available configurations.


Config A




Config B




Config C



Config D

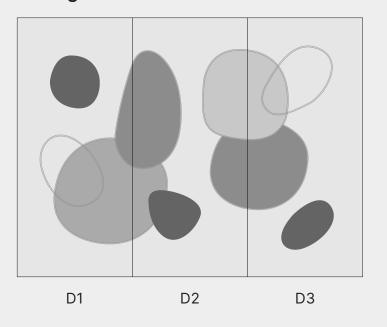

Config E

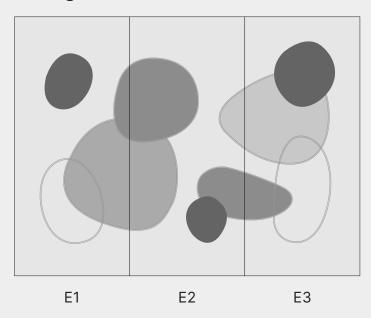

05 PEBBLES WALL PANELS AKUSTUS.COM


## **How to Customize**

Pebbles is designed with varying colours and relief effects in mind. Replace any of these elements with your own colours to create a panel that's uniquely yours.

#### Customization

Custom colour, pattern, shape, and size available.

### **Config D**

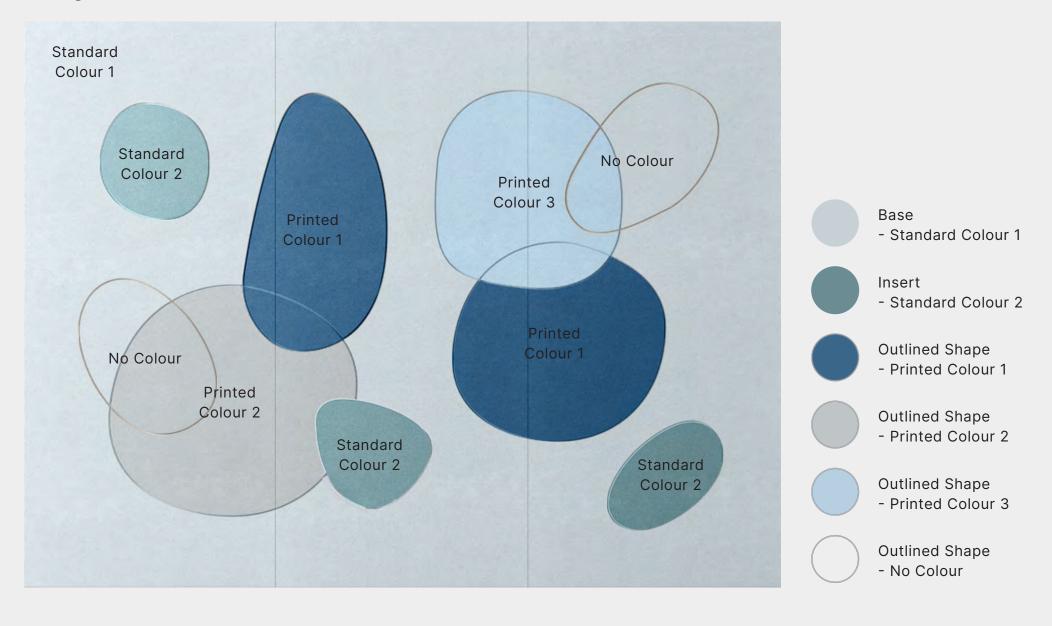

# Colourways

Spice it up with multicoloured panels through our digital printing process. The colours in these curated sets pair perfectly with each other and highlight the structure of the panel design.










07 PEBBLES WALL PANELS AKUSTUS.COM

# Colourways


Config A in Clay Clourways.




Config B in Stone Clourways.




Config C in Lake Clourways.




Config B in Charcoal Clourways.




Config D in Cloud Clourways.

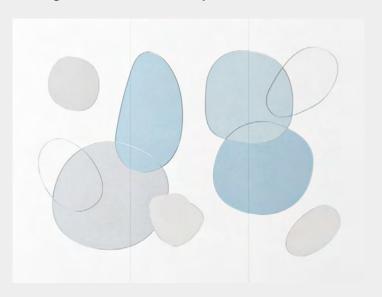

Config E in Sand Clourways.

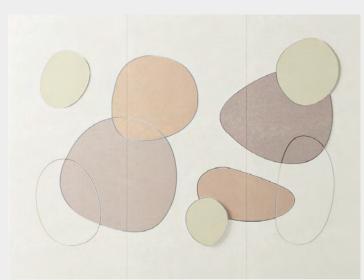

Config D in Algae Clourways.

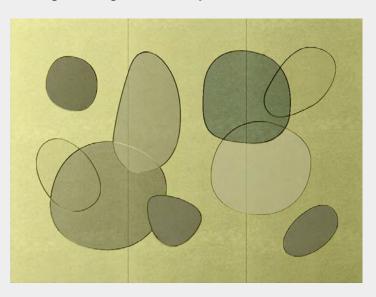

# **Standard** Colours

Choose from any one of our standard colours.

Don't see something you love? Ask us about creating your own custom colour.

\* Available in 12 / 24 mm only. All other colours available in 9, 12, 18, and 24 mm.

**AKUSTUS** 





**Cool Grey** 

SP 36

**Taupe Grey** 

SP 90

**Blush Pink** 

SP 81

**Desert Sage** 

SP 78

Azure\*

SP 07

SP 76

SP 12

SP 93

Moss\*

SP 89

SP 07

Mid Grey

SP 37

Castlerock\*

SP 80

Red

SP 08

**Peacock** 

SP 82

Jordy Blue\*

SP 07



Sky Blue

Navy


SP 07

SP 07


## Installation

This is an overview of the available installation methods. Check out our installation guide for more details.


### **Construction Adhesive**

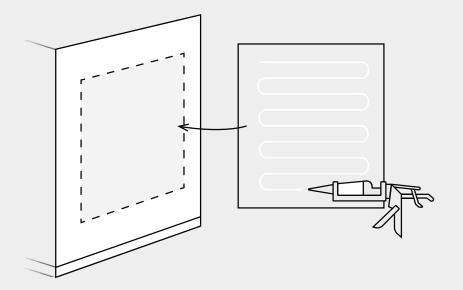


### **Push Mount Clips**

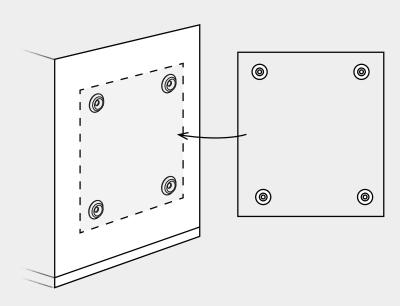

### **Z-Clips**

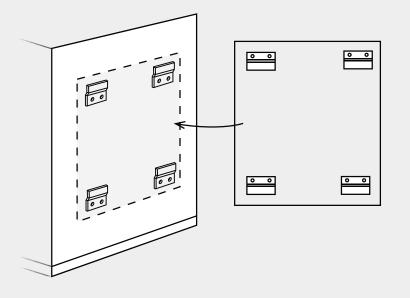

### **Concealed Mechanical Fasteners**

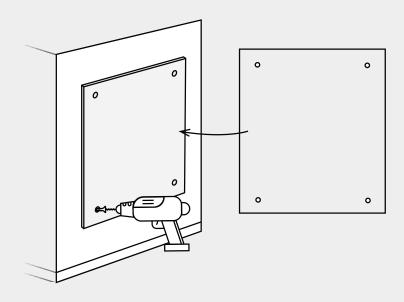

10

#### PEBBLES WALL PANELS AKUSTUS.COM

## **Product Specifications**

### Pebbles Wall Panels

### Composition

100% polyester fibre

### **Health & Safety**

- Fire-rated
- ASTM E84 Class A
- CAN/ULC-S102.2-10 compliant
- Low VOCs
- CDPH v1.2 compliant
- Mould & mildew resistant
- ASTM C1338 compliant

#### **Colour & Texture Variations**

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

#### Sustainability

- 100% recyclable
- Made with 60% post consumer recycled content
- Declare Red List free
- Contributes to LEED certification
- Environmental Product Declaration










## **Sound Absorption Graph**

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

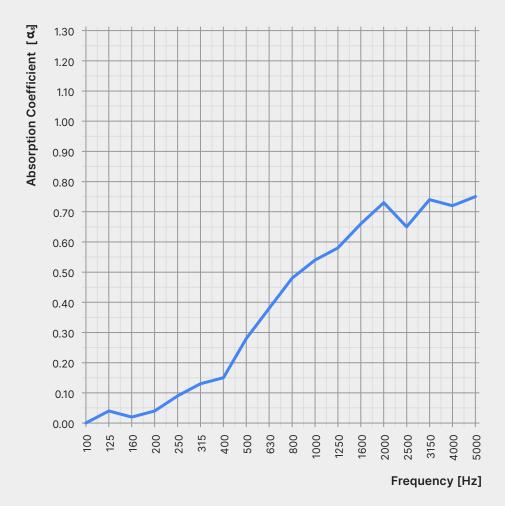

 200
 250
 315
 400
 500
 630
 800
 1000
 1250
 1600
 2000
 2500
 NRC
 SAA

 0.04
 0.09
 0.13
 0.15
 0.28
 0.38
 0.48
 0.54
 0.58
 0.66
 0.73
 0.65
 0.40
 0.39

### **Product Care**

### **Handling & Storage**

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

#### Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

#### Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt.
Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

