


Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a using Type J mounting.

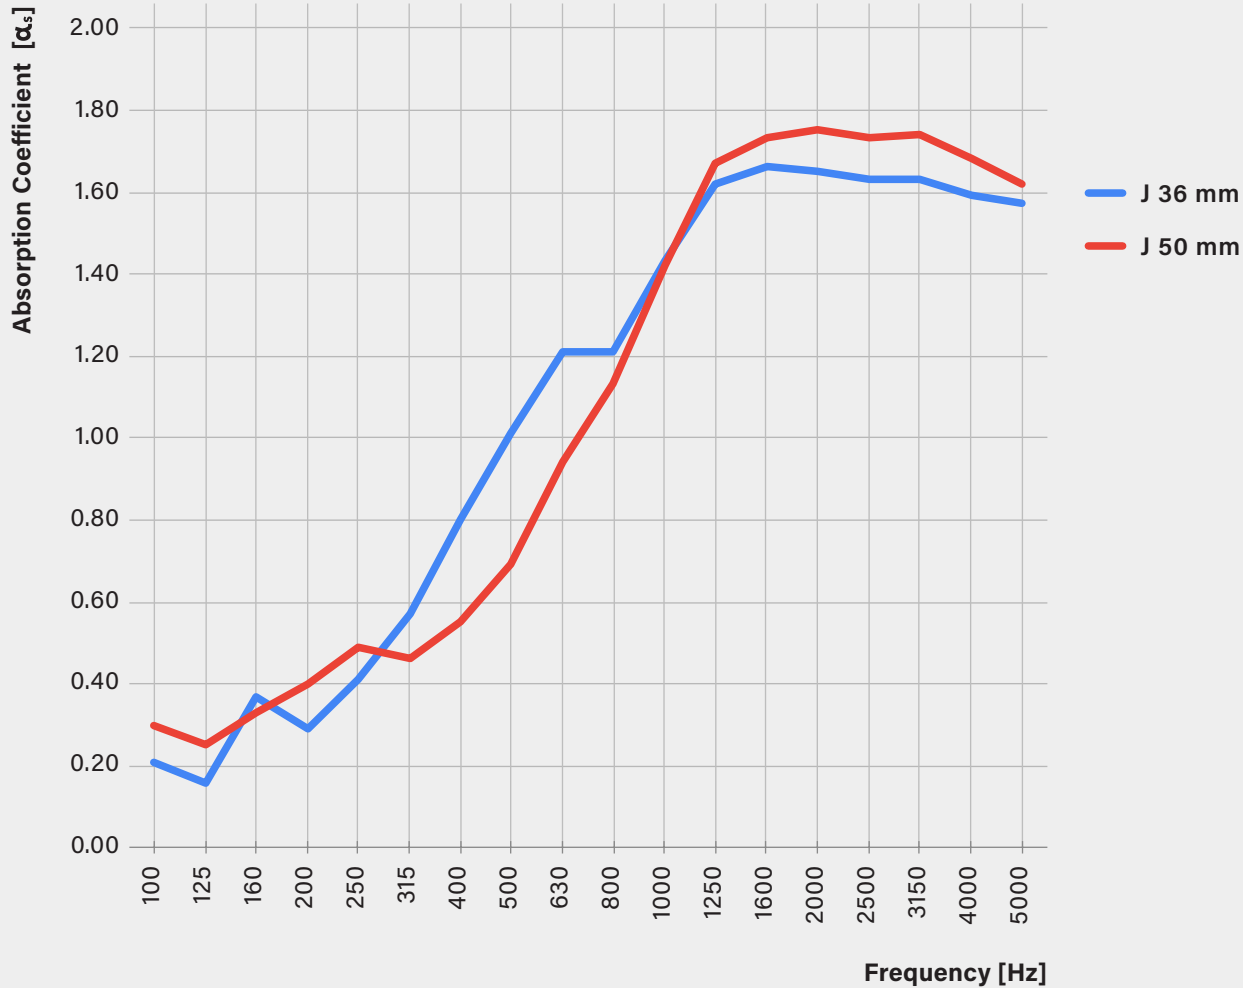

	NRC	SAA	200	250	315	400	500	630	800	1000	1250	1600	2000	2500
J 36 mm	1.15	1.12	0.29	0.41	0.57	0.80	1.01	1.21	1.21	1.43	1.62	1.66	1.65	1.63
J 50 mm	1.10	1.08	0.40	0.49	0.46	0.55	0.69	0.94	1.13	1.42	1.67	1.73	1.75	1.73