# Valley Baffles



#### INFO@AKUSTUS.COM




**A K U S T U S** 


VALLEY


The dips and slopes of Valley Baffle create fascinating visuals from no matter which angle you view them from. While the panel material absorbs excess sound energy, the slanted faces of the baffle cause sound waves to reflect and diffuse more evenly within the room. Let Valley help you create a room that's wonderful to be in and to look at.

### How to Specify

Step by step instructions on how to specify <u>Valley</u> <u>Baffles</u>.








01

02

Choose baffle size. (pg 03) 02 Choose baffle spacing. (pg 04) 03

Choose colour. (pg 05)






04

**Choose installation method.** (pg 06-07)


### Dimensions

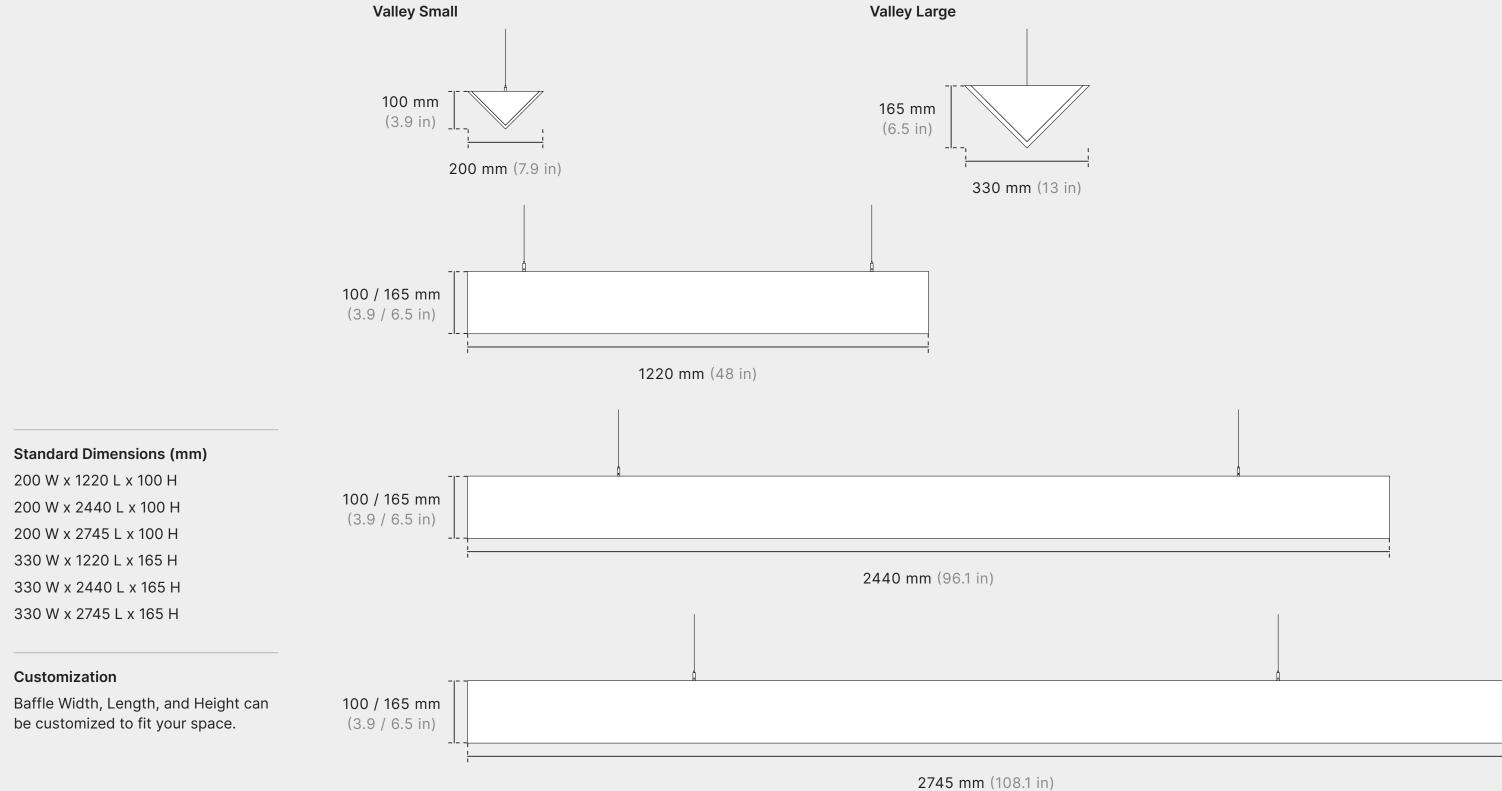

**A K U S T U S** 

# Spacing

Valley Baffles in a cloud configuration makes installation a breeze. Choose from the following standard spacing options.

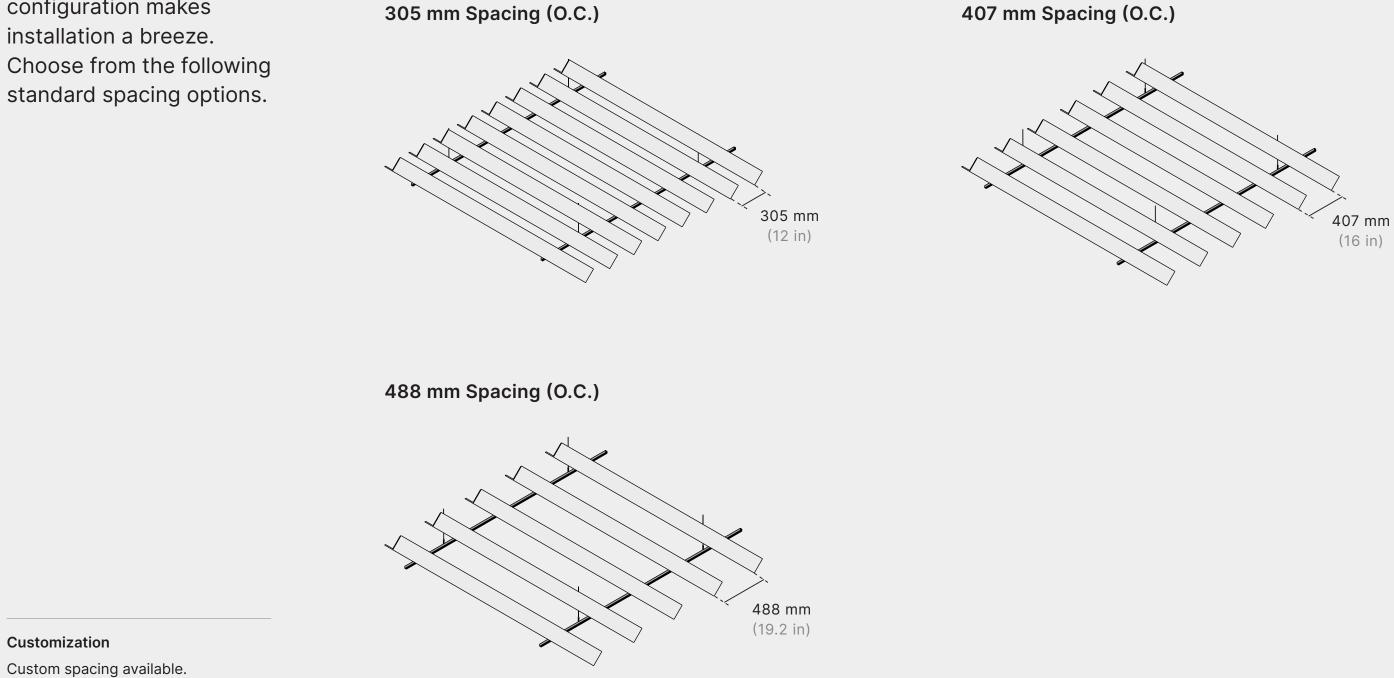

Customization

04

VALLEY

# Standard Colours

Choose from any one of our standard colours.

Urban Grey Warm Grey **Cool Grey** Pure White Pumice SP 79 SP 36 SP 11 SP 07 SP 76 Beige Taupe Grey\* Castlerock\* Sandstone lvory SP 77 SP 04 SP 12 SP 90 SP 80 **Desert Sage** Orange Yam Sunflower Chartreuse SP 46 SP 28 SP 05 SP 43 SP 78 Moss\* Lagoon\* Forest Green **Ocean Green\*** Azure\* SP 89 SP 84 SP 17 SP 86 SP 85 Aquamarine Dark Turquoise Sky Blue **Midnight Blue** Navy SP 19 SP 73 SP 71 SP 25 SP 01

Don't see something you love? Ask us about creating your own custom colour.

All colours available in 9, 12, 18, and 24 mm unless noted otherwise.

\* 12 mm / 24 mm only

**A K U S T U S** 

#### BAFFLES

AKUSTUS.COM



Mid Grey SP 37



Blush Pink SP 81



Peacock\* SP 82



Deep Sea Blue\* SP 83



Purple SP 50



Graphite SP 03



Plum SP 72



Mustard\* SP 87



Krypton SP 30



Black SP 13



Red SP 08



Olive\* SP 88





Pale Teal SP 74

Baffle Cloud Suspension Kit

Baffles are attached to channels and suspended in an array.

- Reduces the number of hanging points on the ceiling
- Hanging points can be moved along the channels

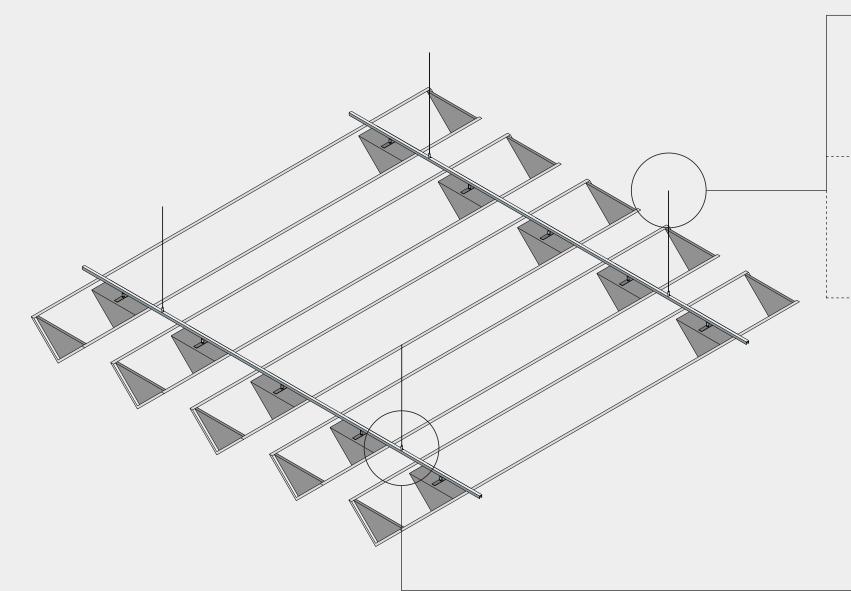


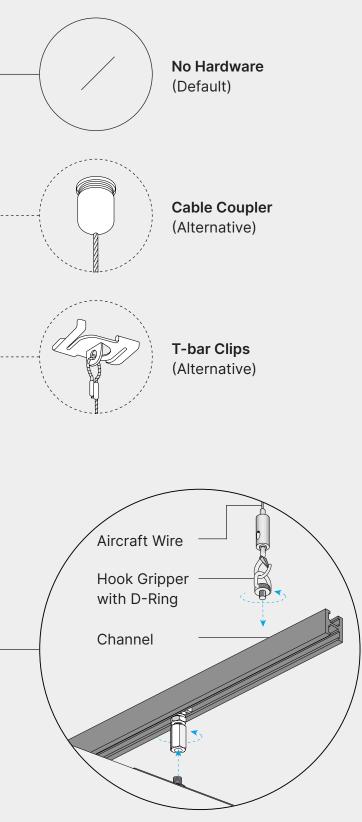


# Installation Option 02

Individual Baffle Suspension Kit

Each baffle is suspended by its own set of aircraft wires.

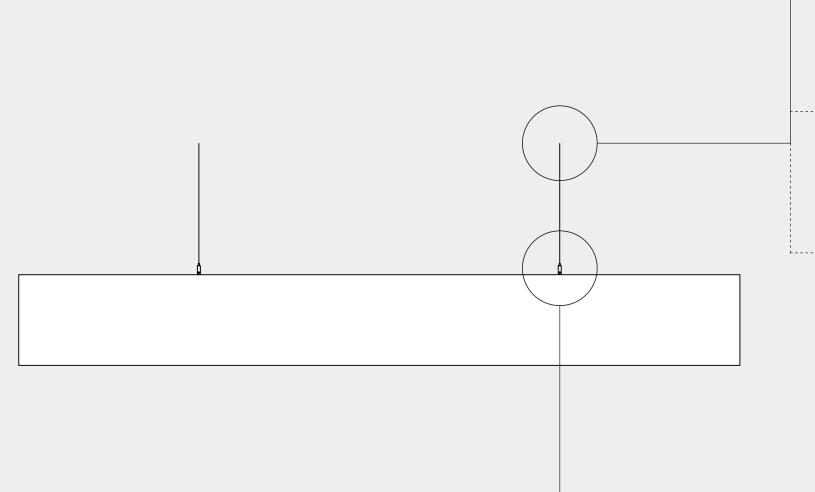

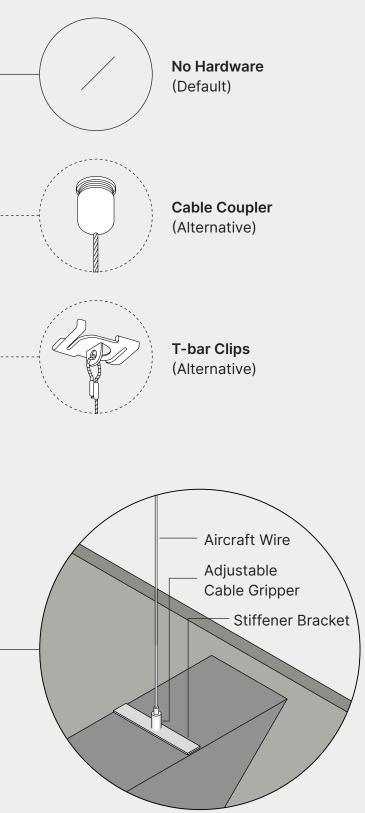

### **Product Specifications**

#### Valley Baffles

#### Composition

100% polyester fibre

#### **VOC Emissions**

CDPH (CA 01350)

#### **Antimicrobial Testing**

Mould & mildew resistant

#### **Fire Rating**

- ASTM E84 Class A
- CAN/ULC-S102.2-10

### **Declare**.

#### Sustainability


- 100% recyclable
- LBC Red List free
- Contributes to LEED certification
- Free of toxic substances and of off-gassing
- Made with ~60% recycled content from plastic water bottles

#### **Colour & Texture Variations**

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

# **Sound Absorption Graph**

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

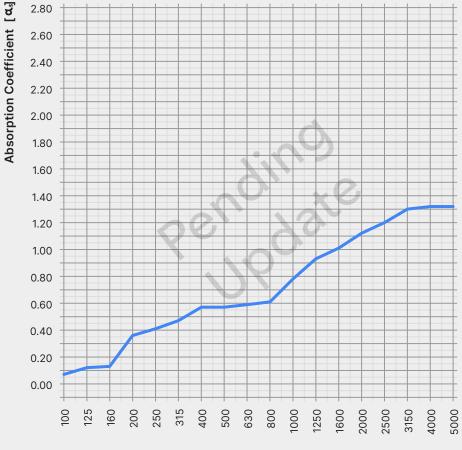

200	250	315	400	500	630	800	1000	1250	1600	2000	2500	NRC	SAA
0.36	0.41	0.47	0.57	0.57	0.59	0.61	0.78	0.93	1.01	1.12	1.20	0.70	0.72



BAFFLES

#### AKUSTUS.COM

Frequency [Hz]

### **Product Care**

09

#### Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

#### Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

#### Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

