Forma Floor Divider

BY AKUSTUS DESIGNS





FMA-FD-A-067-130, FMA-FD-A-078-150, FMA-FD-B-055-130 & FMA-FD-B-063-150

1


Funky geometry and dramatic colours
come together in the Forma Floor
Divider series. Each piece utilizes a boxy
structure and an eye-catching silhouette
to create an unforgettable space.





3


Available Thicknesses: 75 mm (3 in) * Custom shape and size available.

FMA-FD-A-067-130 (Module A)









(3 in)


75 mm


(3 in)



781 mm

(30.7 in)





(3 in)

Product Data

| Product Code | Width |
|------------------|--------------------------|
| FMA-FD-A-067-130 | 677 mm 26.7 in |
| FMA-FD-A-078-150 | 781 mm 30.7 in |
| FMA-FD-A-093-180 | 937 mm 36.9 in |

Height

1300 mm 51.2 in

1500 mm 59.1 in

1800 mm 70.9 in

Depth

75 mm 3 in

75 mm 3 in

75 mm 3 in



1300 mm (51.2 in)


5

Available Thicknesses: 75 mm (3 in) * Custom shape and size available.


550 mm


(21.7 in)

FMA-FD-B-055-130 (Module B)



FMA-FD-B-063-150 (Module B)






(3 in)

FMA-FD-B-076-180 (Module B)

762 mm

(30 in)



Product Data

| Product Code | Width |
|------------------|--------------------------|
| FMA-FD-B-055-130 | 550 mm 21.7 in |
| FMA-FD-B-063-150 | 635 mm 25 in |
| FMA-FD-B-076-180 | 762 mm 30 in |

FORMA FLOOR DIVIDER

(70.9 in)

Height

1300 mm 51.2 in

1500 mm 59.1 in

1800 mm 70.9 in

Depth


75 mm 3 in

75 mm 3 in


75 mm 3 in

Dimensions


Available Thicknesses: 75 mm (3 in) * Custom shape and size available.



FMA-FD-C-083-150 (Module C)





(32.8 in)




75 mm

(3 in)





(39.4 in)



(3 in)

Product Data

| Product Code | Width |
|------------------|---------------------------|
| FMA-FD-C-072-130 | 722 mm 28.4 in |
| FMA-FD-C-083-150 | 833 mm 32.8 in |
| FMA-FD-C-100-180 | 1000 mm 39.4 in |

Height

1300 mm 51.2 in

1500 mm 59.1 in

1800 mm 70.9 in

Depth

75 mm 3 in

75 mm 3 in


75 mm 3 in

Specifications

| Product Name | Forma Floor Divider | |
|--------------------------------|--|---|
| Composition | 100% polyester fibre | |
| Edge Detail | Box edge | |
| Fire Rating | ASTM E84 Class ACAN/ULC-S102.2-10 | |
| VOC Emissions | CDPH (CA 01350) | |
| Antimicrobial Testing | Mould & mildew resistant | |
| Sustainability | 100% recyclable LBC Red List free Contributes to LEED certification Free of toxic substances and of off-gassing Made with ~60% recycled content from plastic water bottles | |
| How to Specify | Product Name & Code Dimensions Colour Installation Method | Decelearee. |
| Colour & Texture Variations | The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation. | BACK BOOK STATES AND A STA |

Acoustic Properties

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a using Type J mounting.

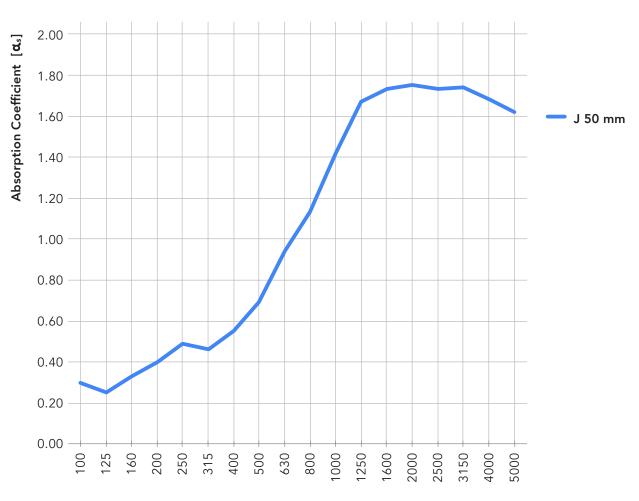

| | NRC | SAA | 200 | 250 | 315 | 400 | 500 | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 |
|---------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| J 50 mm | 1.10 | 1.08 | 0.40 | 0.49 | 0.46 | 0.55 | 0.69 | 0.94 | 1.13 | 1.42 | 1.67 | 1.73 | 1.75 | 1.73 |

Frequency [Hz]

11

Installation

Specify installation method at the time of ordering.

- Aluminum Base Plate
- Aluminum Base Plate with Castors

Colours



Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight and the elements.

Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

FORMA FLOOR DIVIDER

