


# Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a using Type D-50 mounting.

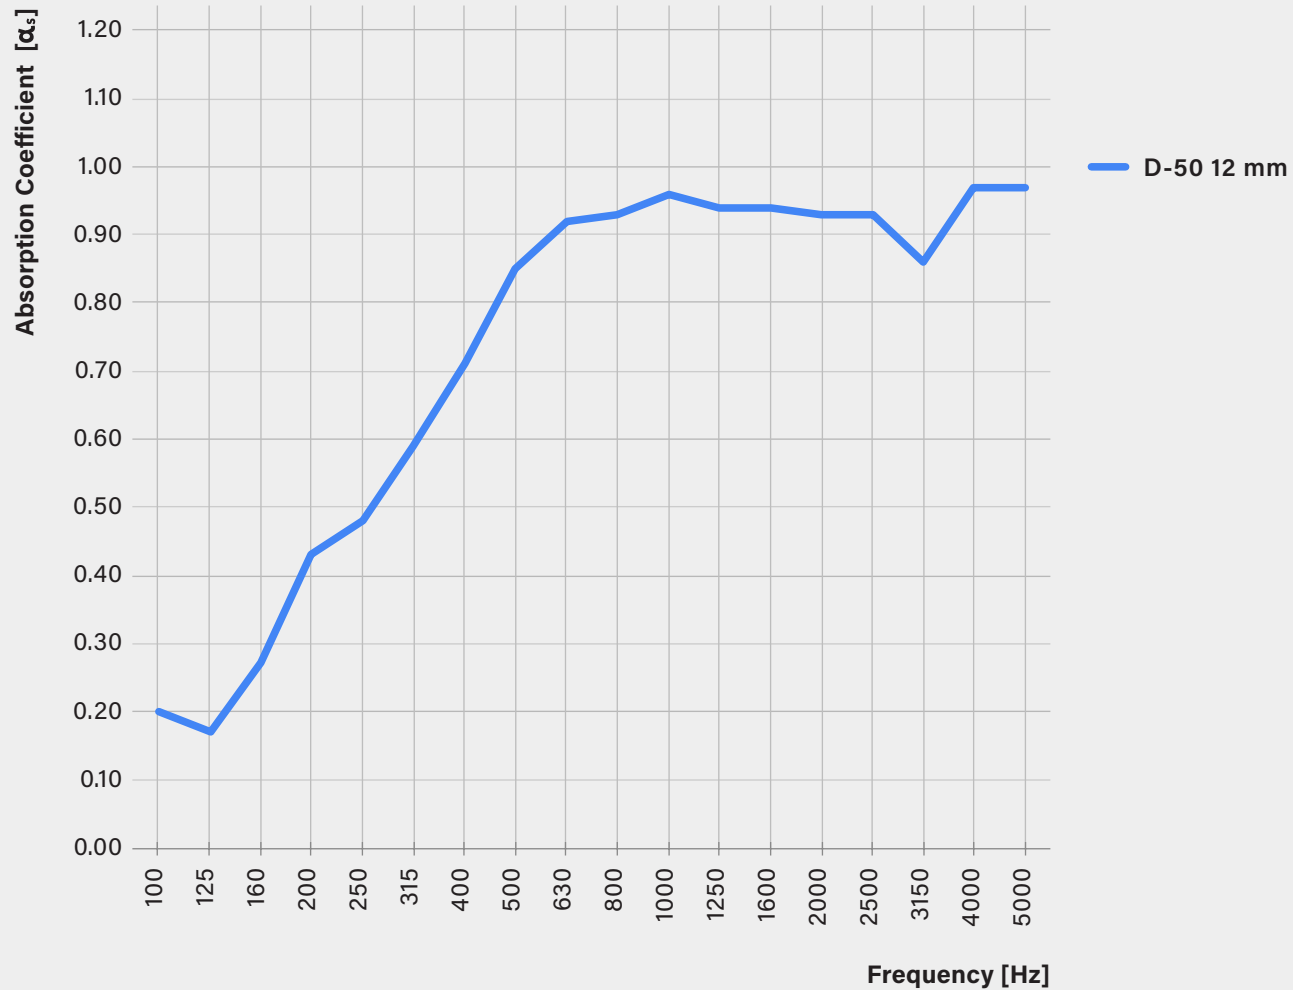

|                   | NRC  | SAA  | 200  | 250  | 315  | 400  | 500  | 630  | 800  | 1000 | 1250 | 1600 | 2000 | 2500 |
|-------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>D-50 12 mm</b> | 0.80 | 0.80 | 0.43 | 0.48 | 0.59 | 0.71 | 0.85 | 0.92 | 0.93 | 0.96 | 0.94 | 0.94 | 0.93 | 0.93 |