
AKUSTUS DESIGNS BAFFLE INFO@AKUSTUS.COM AKUSTUS.COM

Aero Baffle




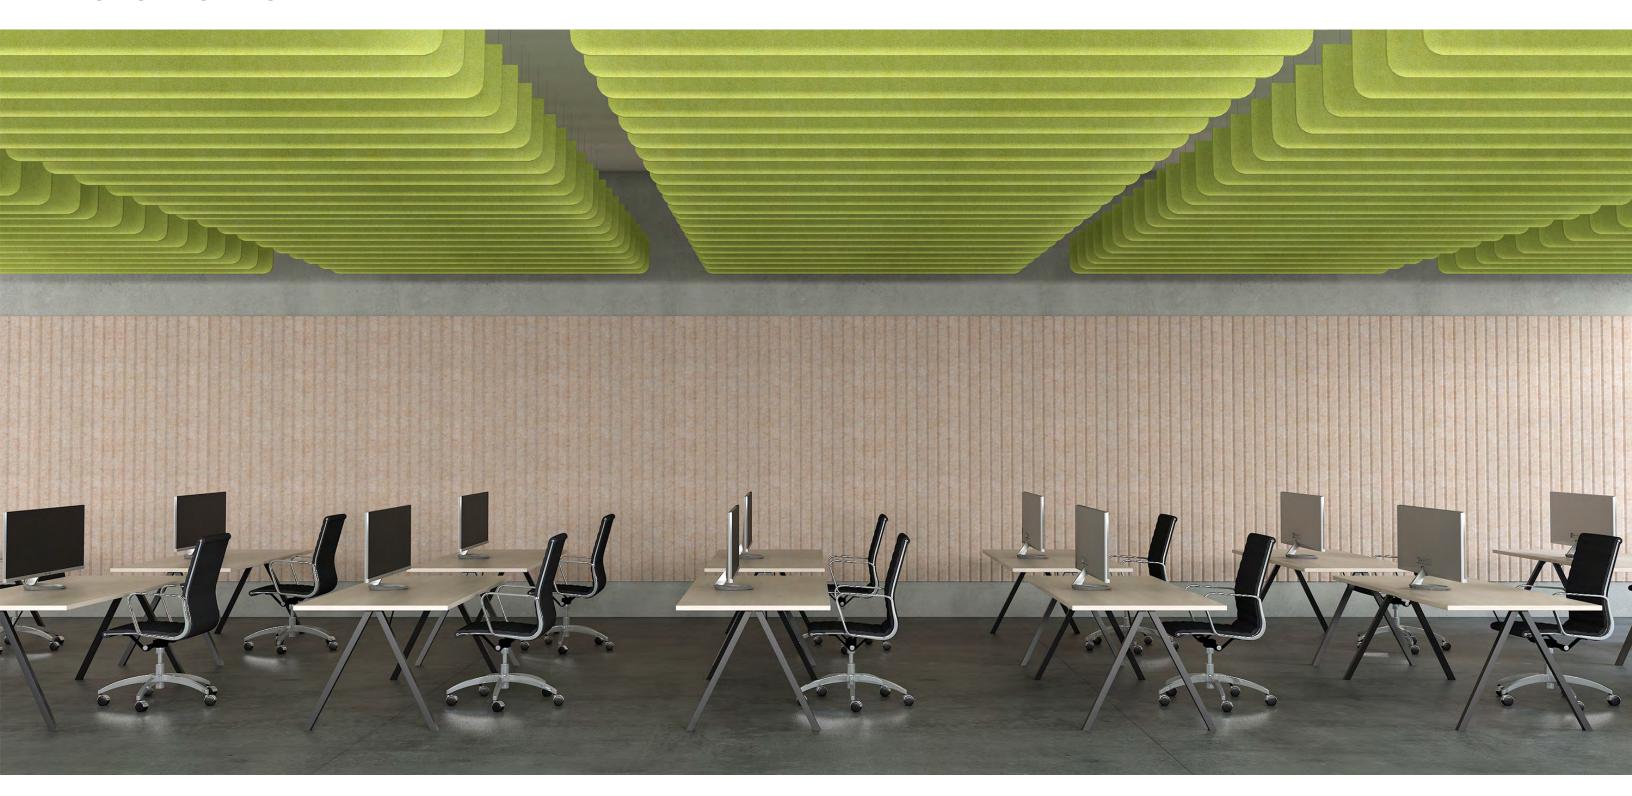



Sleek and minimal, Aero
Baffles are versatile acoustic
solutions that will transform
any space they occupy.
Suspend these baffles from
the ceiling to see and hear
what a difference they make.


How to Specify


Step by step instructions on how to specify <u>Aero Baffles</u>.











BAFFLE

O1
Choose thickness.
(pg 03)

O2
Choose baffle length.
(pg 03)

O3
Choose baffle spacing
(on center). (pg 04)

O4
Choose colour.
(pg 05)

O5
Choose installation method. (pg 06,07)

Dimensions

Standard Dimensions (mm)

1220 L x 305 H

2440 L x 305 H

2745 L x 305 H

Standard Thicknesses (mm)

12, 18, and 24

Edge Detail



Square Edge

Corner Detail




Filleted Corner (Standard)



Square Corner (Optional)

Customization

Baffle Length and Height can be customized to fit your space.

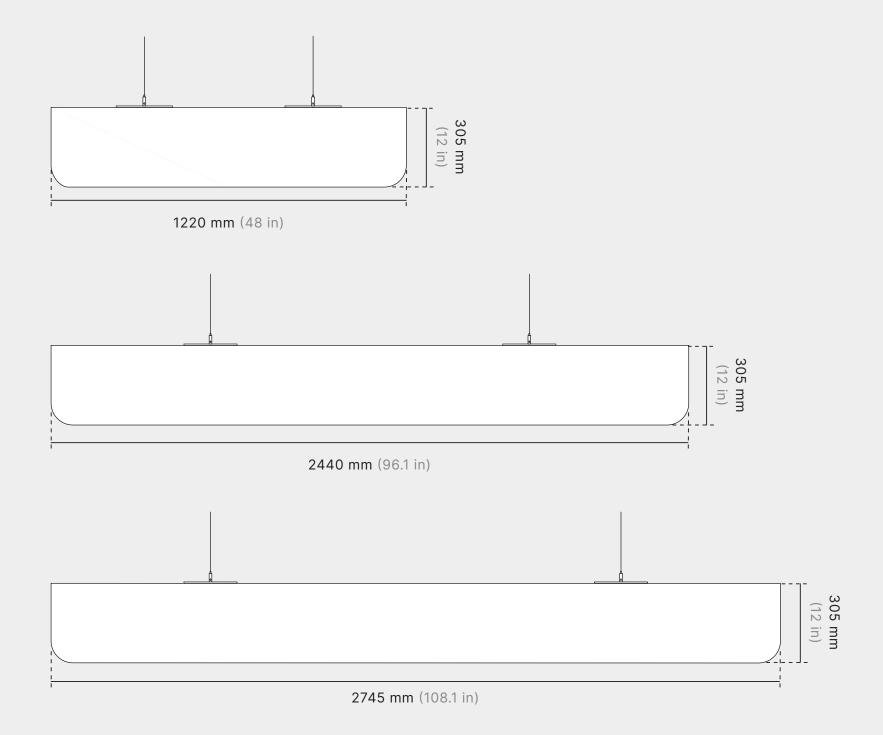



04 AERO BAFFLE AKUSTUS.COM

Configurations

Aero Baffles in a cloud configuration makes installation a breeze.
Choose baffle length and spacing to suit your needs.

Standard Spacing Options

100mm


152mm

203mm

300mm


Custom spacing available.

Configuration Example

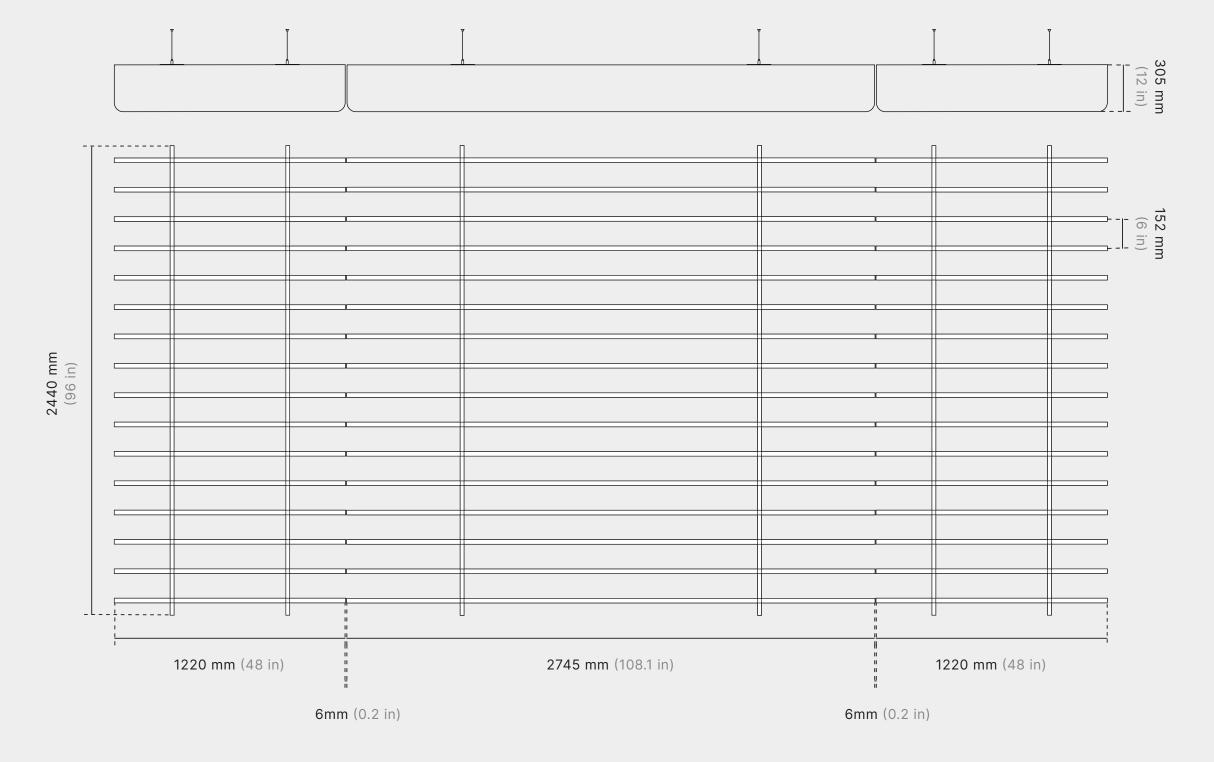

Standard Colours

Choose from any one of our standard colours.

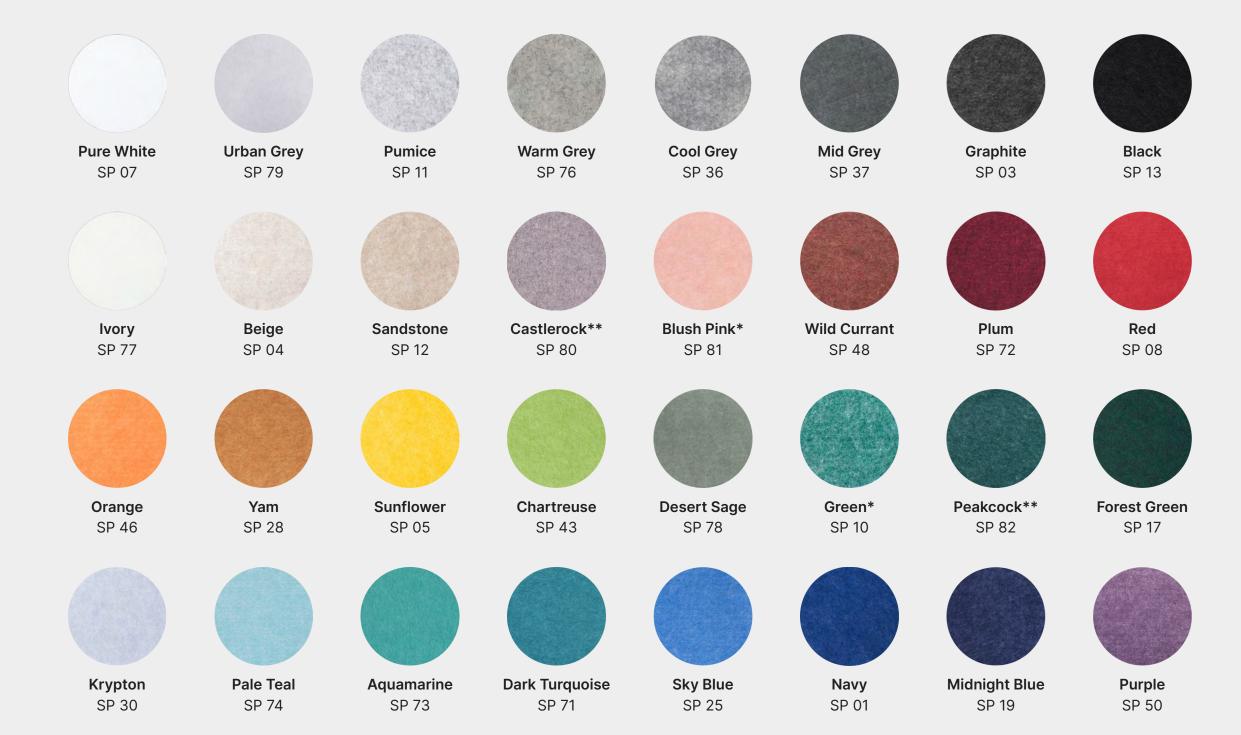


Don't see something you love? Ask us about creating your own custom colour.


- * Only available in 9mm and 18mm
- ** Only available in 12mm and 24mm

Installation and Hardware

Baffle Cloud Suspension Kit

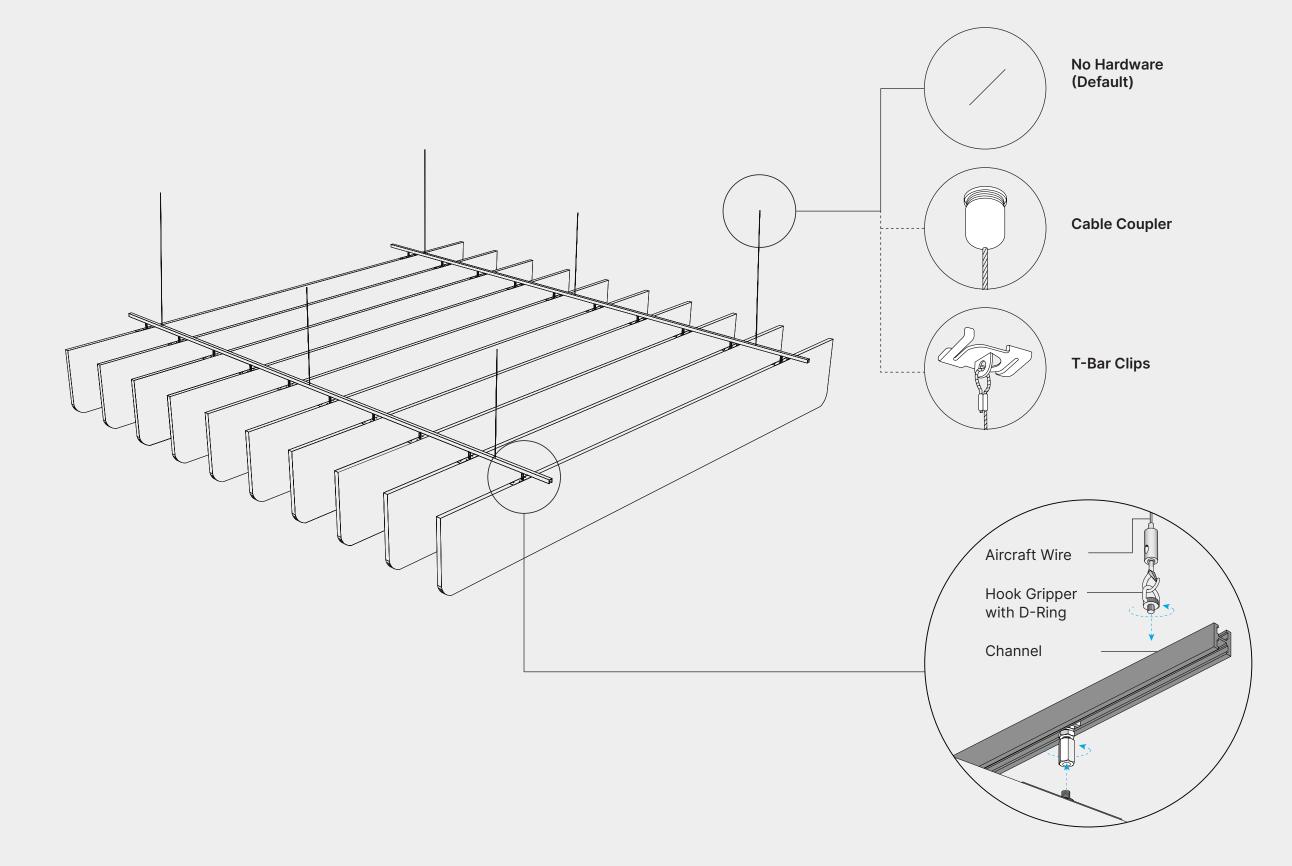

Hardware Accessories



Channel Connector


• Connect multiple clouds together



07 AERO BAFFLE AKUSTUS.COM

Installation and Hardware

Baffle Suspension Kit (Individual Suspension)

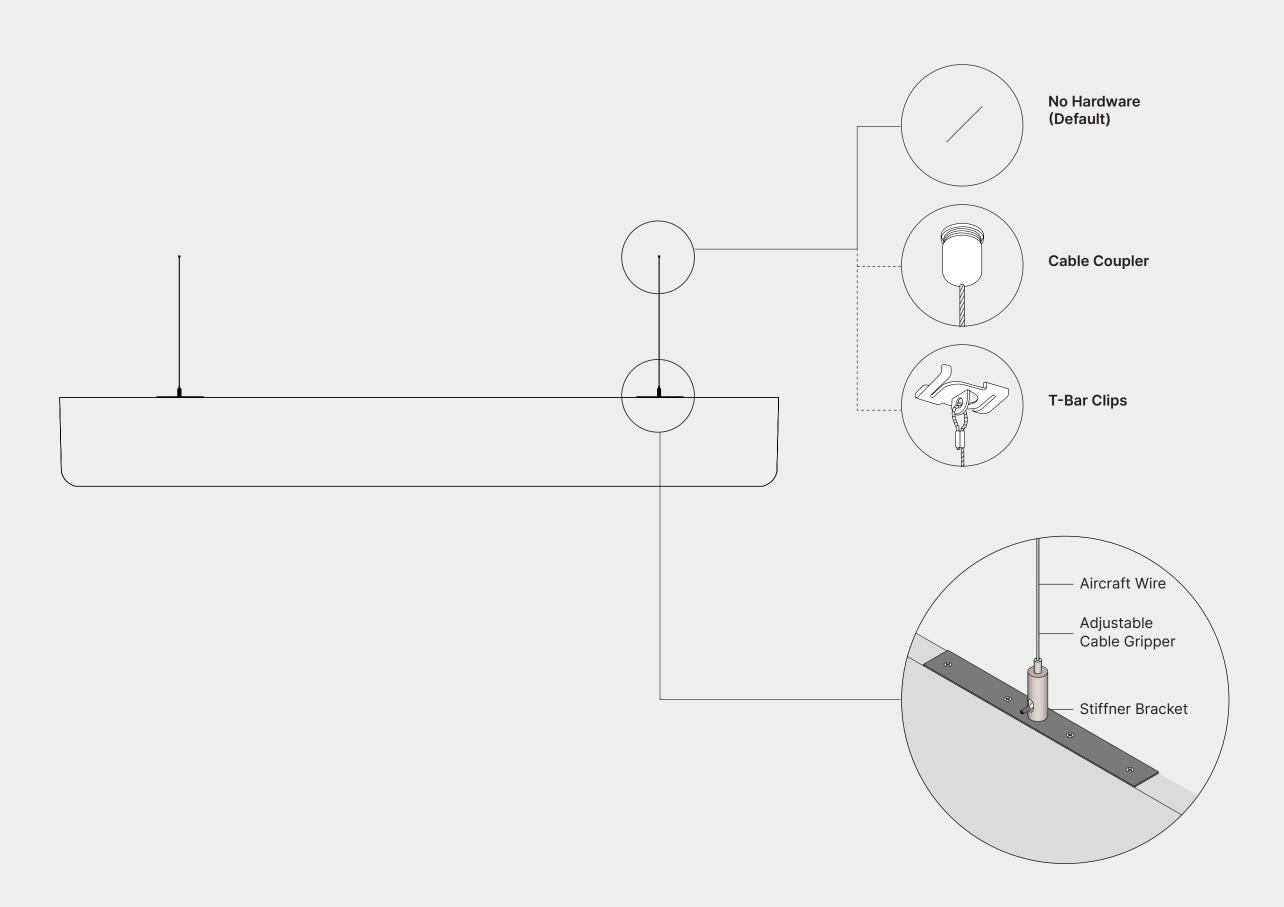

80

Product Specifications

Aero Baffles

Composition

100% polyester fibre

VOC Emissions

CDPH (CA 01350)

Antimicrobial Testing

Mould & mildew resistant

Fire Rating

- ASTM E84 Class A
- CAN/ULC-S102.2-10



Sustainability

- 100% recyclable
- LBC Red List free
- Contributes to LEED certification
- Free of toxic substances and of off-gassing
- Made with ~60% recycled content from plastic water bottles

Colour & Texture Variations

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.



	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	NRC	SAA
12 mm	0.36	0.41	0.47	0.57	0.57	0.58	0.61	0.78	0.93	1.01	1.12	1.20	0.70	0.72
18 mm	0.38	0.45	0.55	0.64	0.68	0.73	0.78	1.01	1.21	1.31	1.38	1.47	0.90	0.88



Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight and the elements.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

