

# Batten 3D Panel

BY AKUSTUS DESIGNS







BTN-3D-B-120-242

The **Batten 3D Panel** exemplifies how practical elements of construction and architecture can be featured as decorations in their own right. Mount Batten to the wall to absorb and reduce noise in a pub or in the waiting area of a clinic.





BTN-3D-A-120-242







# Dimensions

\* Custom shape, size and batten orientation available. Battens may run vertically or horizontally.





## Batten Narrow (A)

Available Depth: 36 mm (1.4 in)

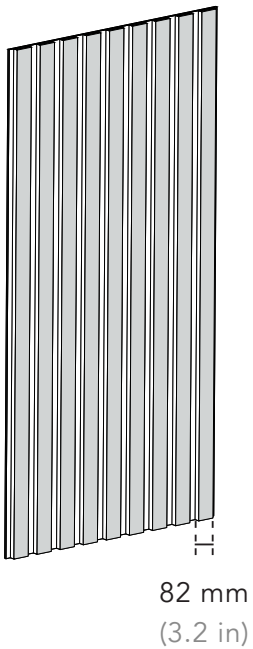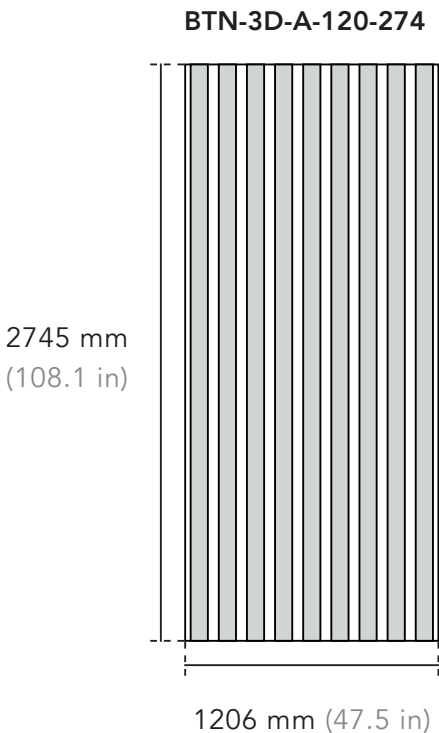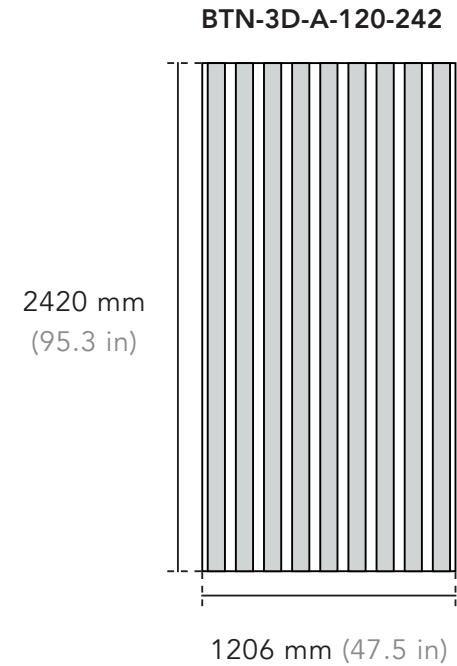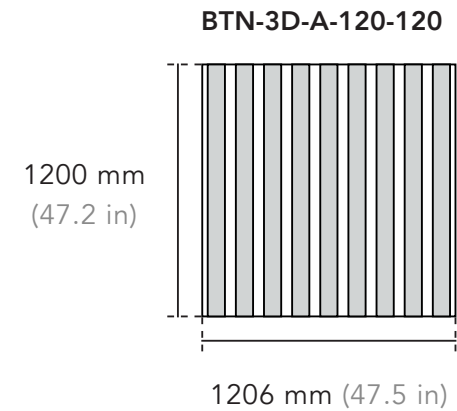


## Batten Wide (B)

Available Depth: 82 mm (3.2 in)

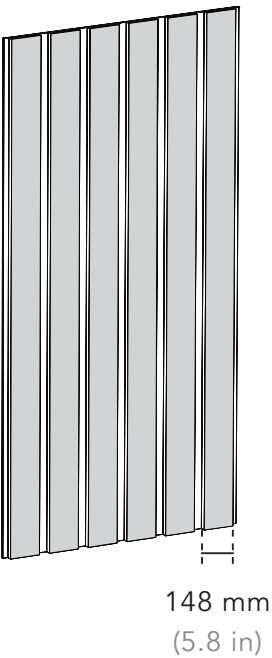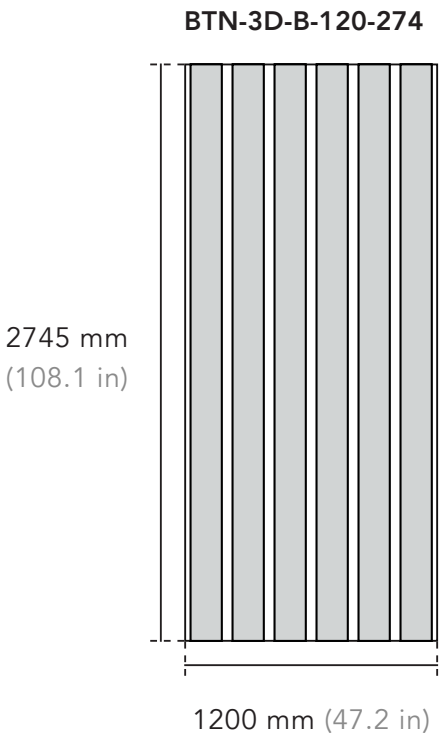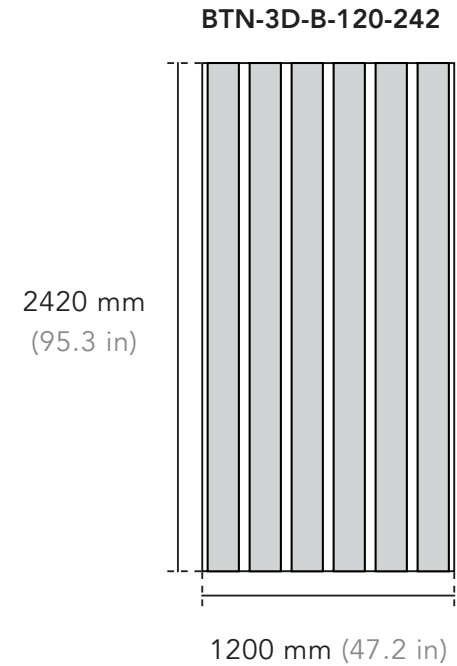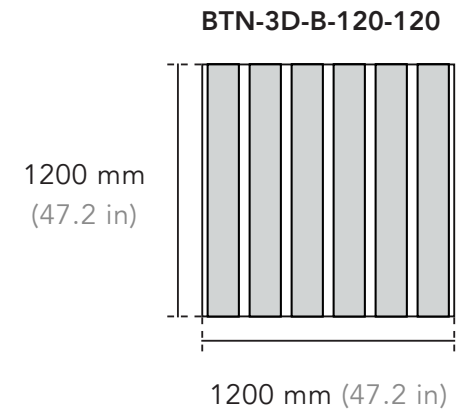

## Dimensions

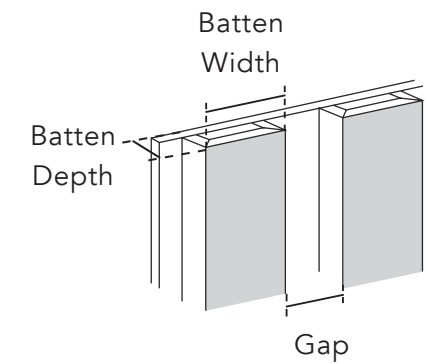

Batten Variation	Batten Width	Batten Depth	Gap
Narrow	82 mm 3.2 in	36 mm 1.4 in	52 mm 2 in
Wide	148 mm 5.8 in	82 mm 3.2 in	52 mm 2 in
Custom	Customizable	Customizable	Customizable

## Product Data

Product Code	Width x Height	Depth	Weight
BTN-3D-A-120-120 Narrow	1206 x 1200 mm 47.5 x 47.2 in	36 mm 1.4 in	5.7 kg 12.6 lb
BTN-3D-A-120-242 Narrow	1206 x 2420 mm 47.5 x 95.3 in	36 mm 1.4 in	11.5 kg 25.4 lb
BTN-3D-A-120-274 Narrow	1206 x 2745 mm 47.5 x 108.1 in	36 mm 1.4 in	16.3 kg 35.9 lb
BTN-3D-B-120-120 Wide	1200 x 1200 mm 47.2 x 47.2 in	82 mm 3.2 in	7 kg 15.4 lb
BTN-3D-B-120-242 Wide	1200 x 2420 mm 47.2 x 95.3 in	82 mm 3.2 in	14.2 kg 31.3 lb
BTN-3D-B-120-274 Wide	1200 x 2745 mm 47.2 x 108.1 in	82 mm 3.2 in	20.1 kg 44.3 lb




Specifications

Product Name	Batten 3D Panel
Composition	100% polyester fibre
Edge Detail	Square edge
Fire Rating	<ul style="list-style-type: none"><li>ASTM E84 Class A</li><li>CAN/ULC-S102.2-10</li></ul>
VOC Emissions	CDPH (CA 01350)
Antimicrobial Testing	Mould & mildew resistant
Sustainability	<ul style="list-style-type: none"><li>100% recyclable</li><li>LBC Red List free</li><li>Contributes to LEED certification</li><li>Free of toxic substances and of off-gassing</li><li>Made with ~60% recycled content from plastic water bottles</li></ul>
How to Specify	<ul style="list-style-type: none"><li>Product Name &amp; Code</li><li>Dimensions</li><li>Colour</li><li>Installation Method</li></ul>
Colour & Texture Variations	The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.



Acoustic Properties

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a using Type A mounting.

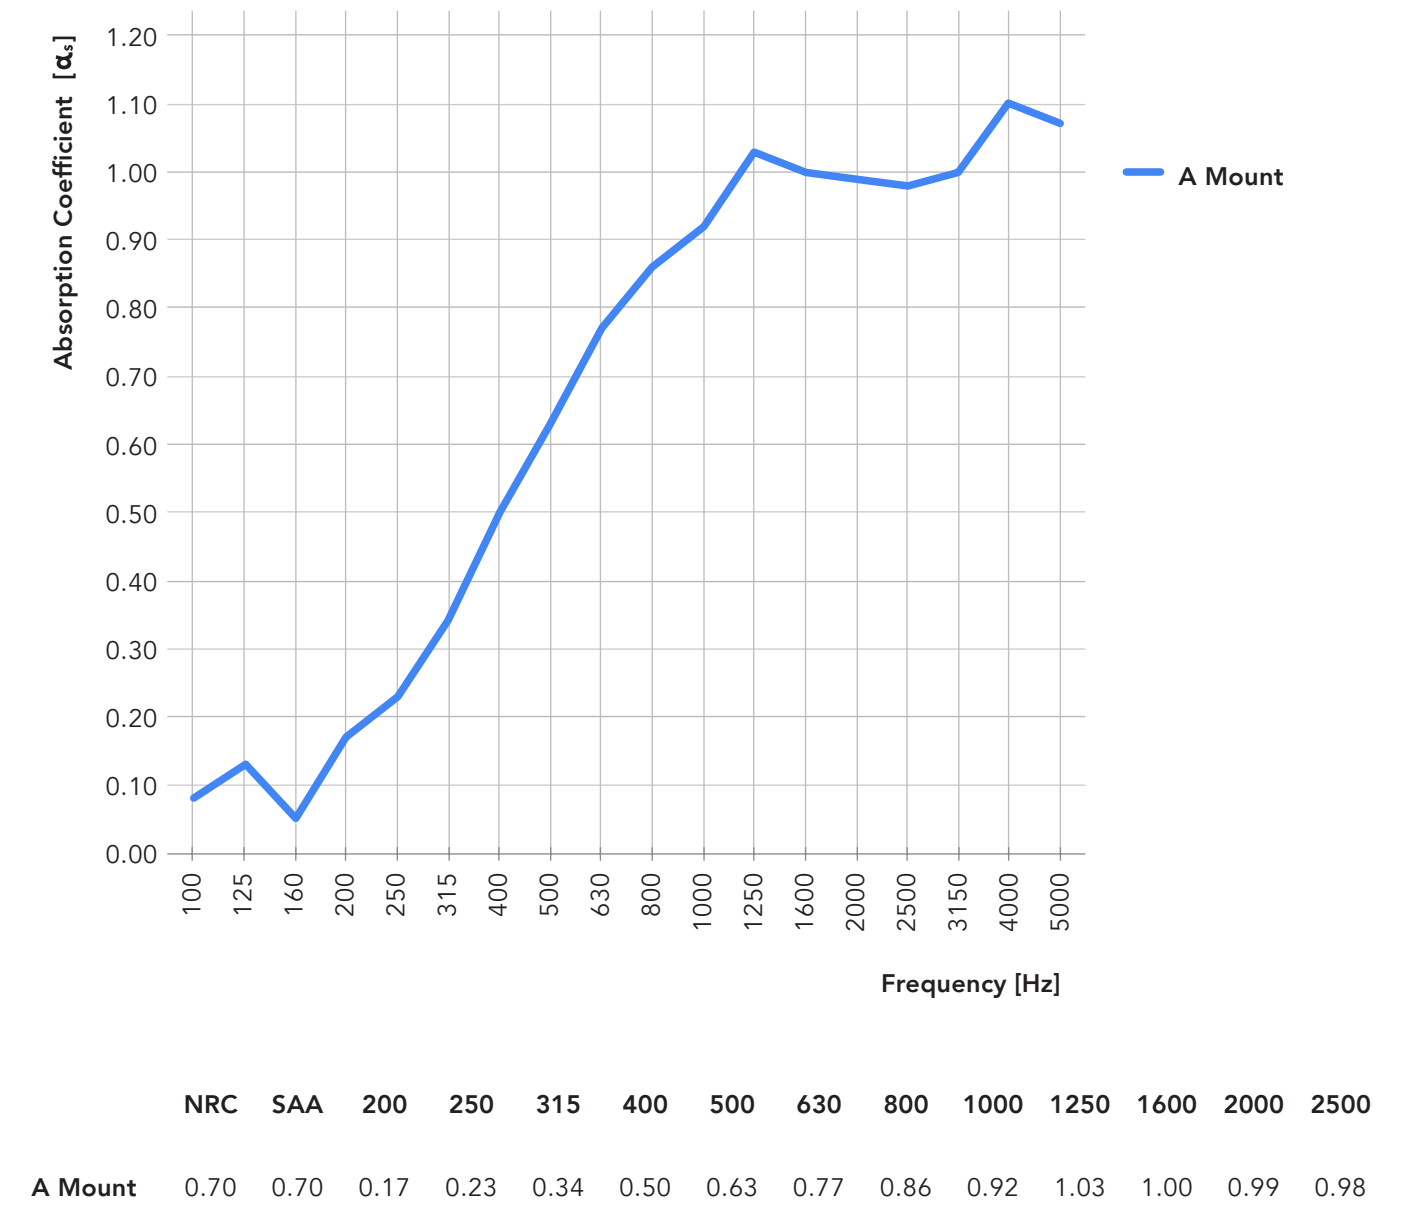




# Installation


Specify one of the following options at the time of ordering.

## Construction Adhesive

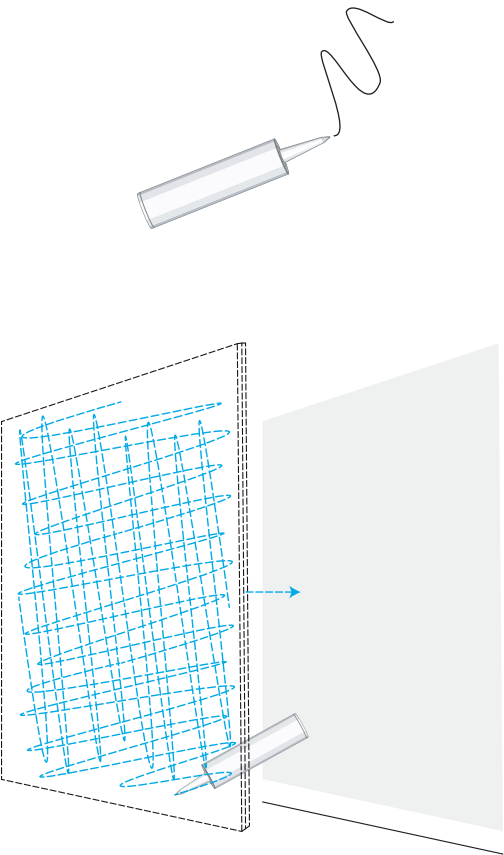


- By others
- Recommendation
- Liquid Nails Heavy Duty (Low VOC) LN-903
- Alternatives
- LePage PL Premium
  - LePage PL Premium Max
  - LePage No More Nails Heavy Duty
  - LePage No More Nails Ultimate Crystal Clear
  - (At your discretion, other construction adhesive may be used but should be tested for effectiveness)


## Z-clips (KT-ZCLP-00)

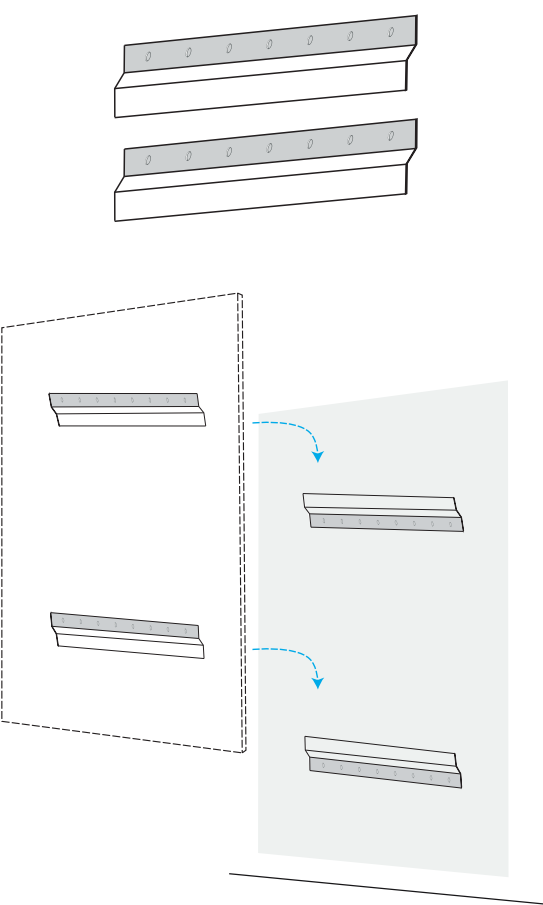

- 6 mm (¼ in) projection from the wall
- 25 mm (1 in) clearance required above the panel



## Push Mounts (KT-PUSH-00)

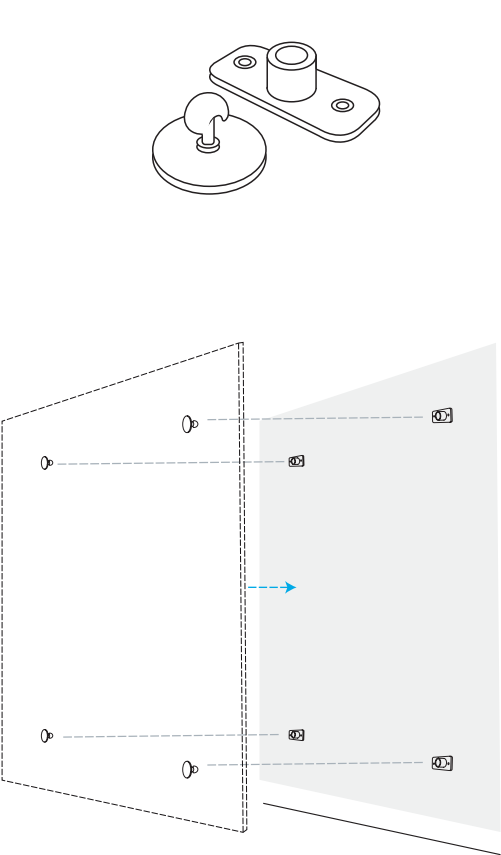

- Panels come with mounts pre-installed but receiving mount must be installed on-site

# Product Care

## Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight and the elements.






























## Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

## Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

# Colours

 Pure White SP 07	 Krypton SP 30	 Urban Grey SP 79	 Pumice SP 11	 Warm Grey SP 76	 Cool Grey SP 36
 Ivory SP 77	 Beige SP 04	 NEW Castlerock SP 80	 Mid Grey SP 37	 Graphite SP 03	 Black SP 13
 Sandstone SP 12	 Orange SP 46	 Yam SP 28	 Wild Currant SP 48	 Plum SP 72	 Red SP 08
 Sunflower SP 05	 Chartreuse SP 43	 Desert Sage SP 78	 NEW Peacock SP 82	 Forest Green SP 17	 Dark Turquoise SP 71
 Aquamarine SP 73	 Pale Teal SP 74	 Sky Blue SP 25	 Navy SP 01	 Midnight Blue SP 19	