


Cylinder Baffle

BY AKUSTUS DESIGNS



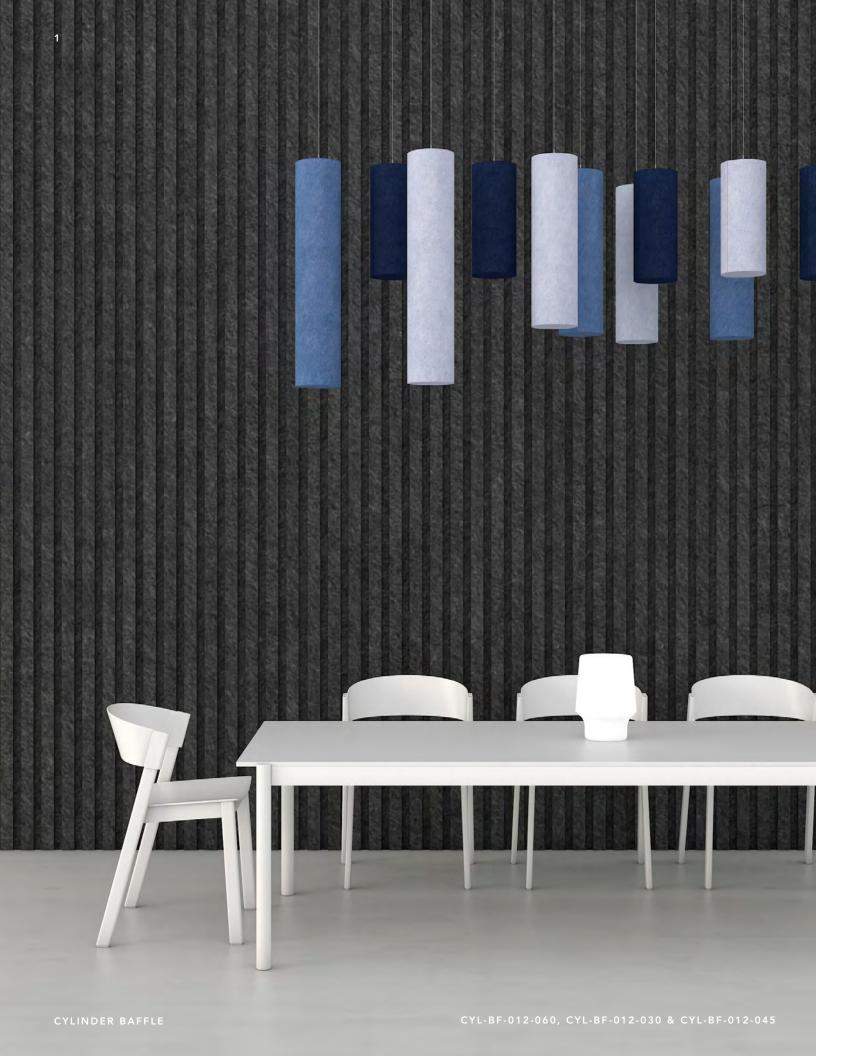


Regardless of whether they're arranged to resemble stalactites, icicles, or a chandelier, a cluster of **Cylinder Baffles** hanging from the ceiling creates a scene of beauty and wonder. Noise won't be the only thing struck with awe when you suspend these baffles in the hotel foyer or in the bank lobby.





Dimensions

* Custom size available.

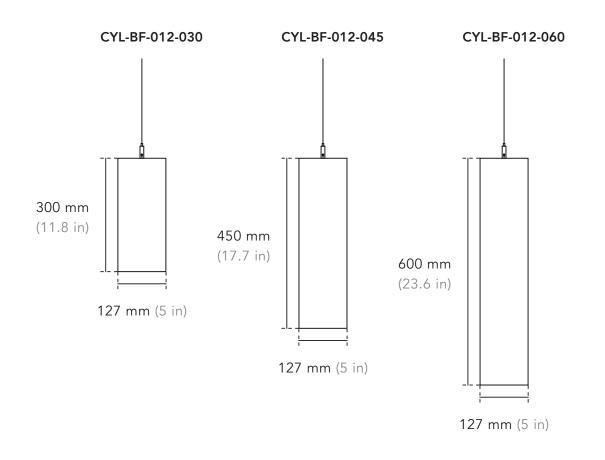

Product Data

Product Code	Diameter	Height	Weight
CYL-BF-012-030	127 mm 5 in	300 mm 11.8 in	0.4 kg 0.9 lb
CYL-BF-012-045	127 mm 5 in	450 mm 17.7 in	0.6 kg 1.3 lb
CYL-BF-012-060	127 mm 5 in	600 mm 23.6 in	0.9 kg 2 lb

7

Specifications

Product Name

Cylinder Baffle

Composition

100% polyester fibre

Fire Rating

• ASTM E84 Class A

• CAN/ULC-S102.2-10

VOC Emissions

CDPH (CA 01350)

Antimicrobial Testing

Mould & mildew resistant

Sustainability

- 100% recyclable
- LBC Red List free
- Contributes to LEED certification
- Free of toxic substances and of
 - off-gassing
- Made with ~60% recycled content

from plastic water bottles

How to Specify

- Product Name & Code
- Dimensions
- Colour
- Installation Method


Colour & Texture Variations

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.



Acoustic Properties

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a using Type J mounting. Update for test results pending.

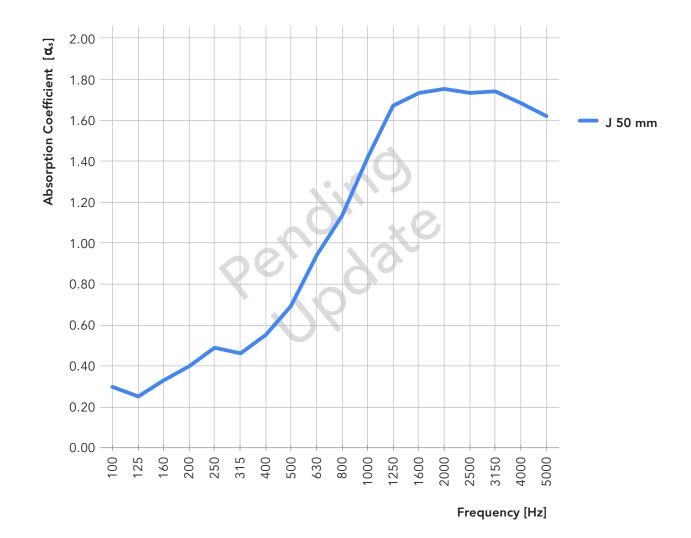

	NRC	SAA	200	250	315	400	500	630	800	1000	1250	1600	2000	2500
J 50 mm	1.10	1.08	0.40	0.49	0.46	0.55	0.69	0.94	1.13	1.42	1.67	1.73	1.75	1.73

CYLINDER BAFFLE


CYLINDER BAFFLE

9 10

Installation - Cylinder Baffle Kit (KT-CYBF-00)

Specify optional ceiling hardware at the time of ordering.

Ceiling Hardware Options

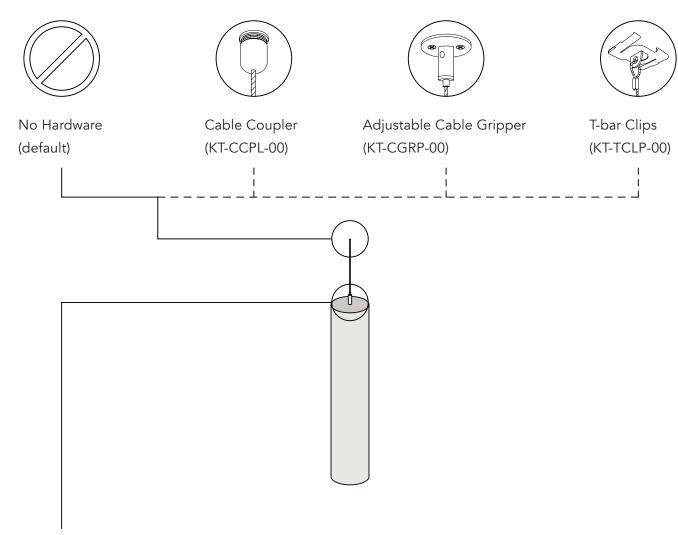

Product Hardware



Integrated Adjustable Cable Gripper

Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight and the elements.

Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.


CYLINDER BAFFLE

CYLINDER BAFFLE

11

12

Colours

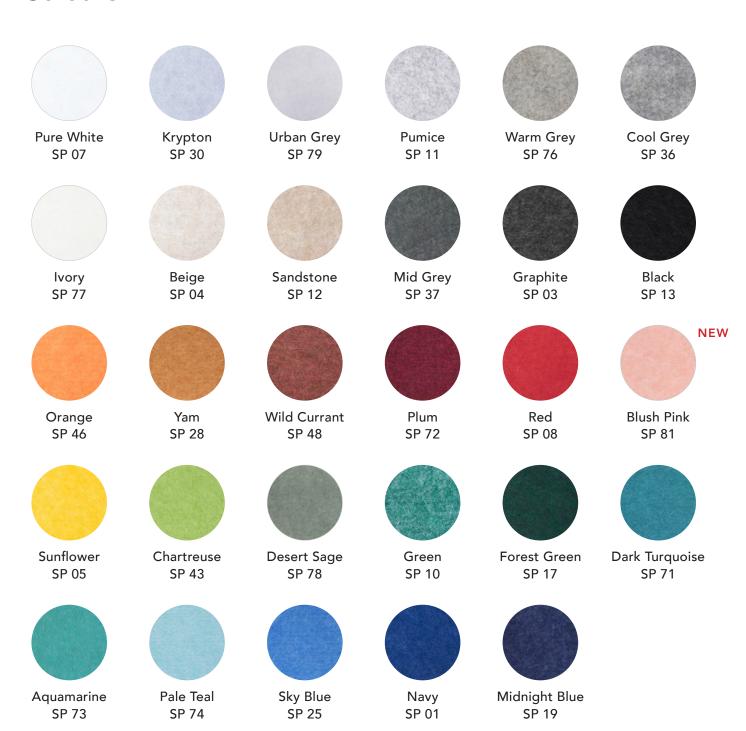





2022.09

AKUSTUS.COM