



Mesh Clouds

BY AKUSTUS DESIGNS

AKUSTUS

®

[AKUSTUS.COM](https://akustus.com)

[INFO@AKUSTUS.COM](mailto:info@akustus.com)




MSH-CL-SA-274-274, MSH-CL-SB-274-274 & MSH-CL-SC-274-274

Mesh Clouds is a collection of cloud designs inspired by the movement of water. Each individual cloud functions as a module that can be connected to create continuous patterns that ripple across the ceiling.





Dimensions - Drop

Modules can be connected together to create a continuous ceiling feature.

* Custom shape and size available.

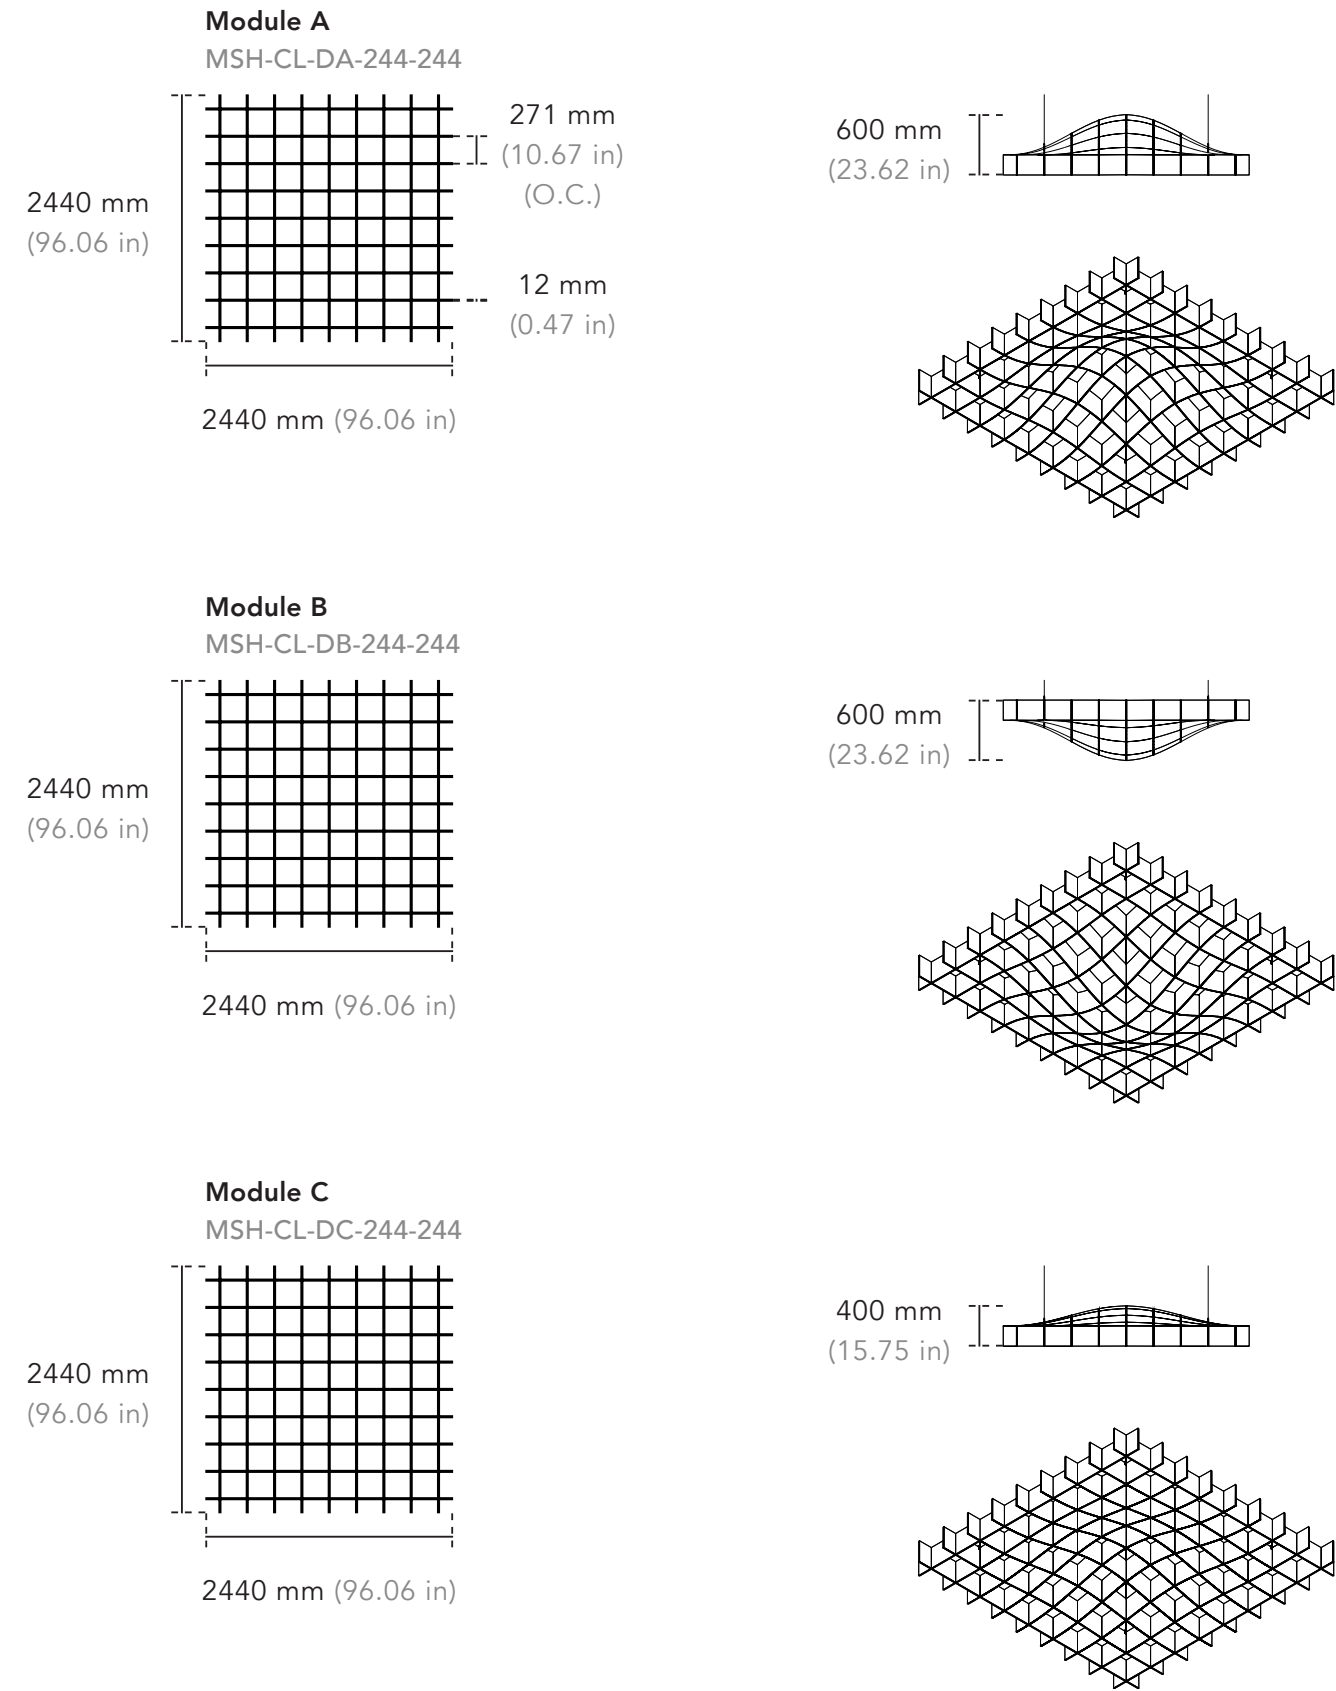





Dimensions - Drop

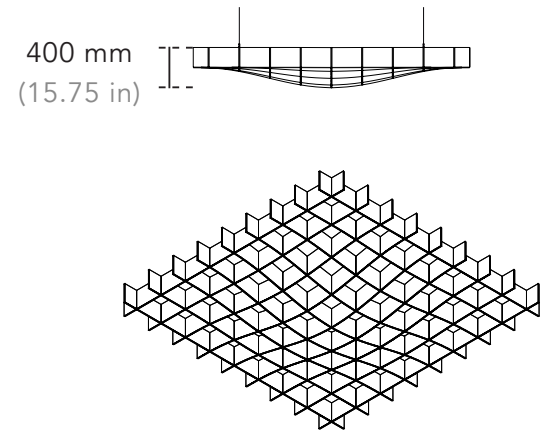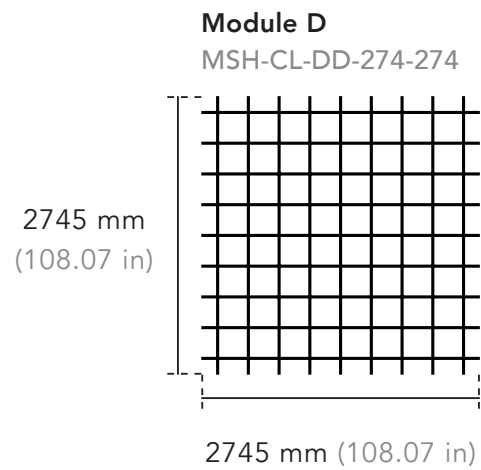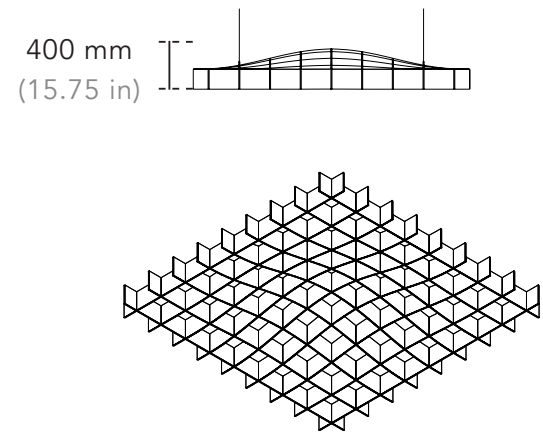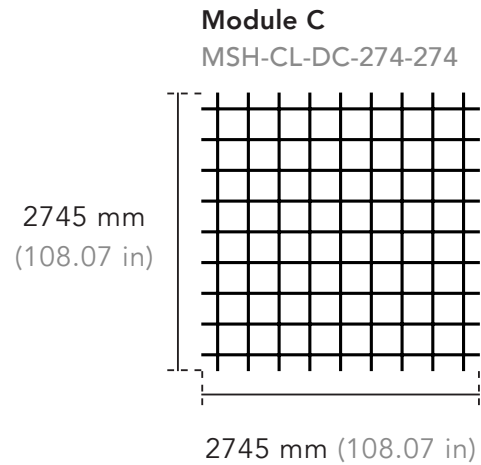

Product Data

Product Code	Width	Length	Height
MSH-CL-DA-244-244 Drop, Module A	2440 mm 96.06 in	2440 mm 96.06 in	600 mm 23.62 in
MSH-CL-DA-274-274 Drop, Module A	2745 mm 108.07 in	2745 mm 108.07 in	600 mm 23.62 in
MSH-CL-DB-244-244 Drop, Module B	2440 mm 96.06 in	2440 mm 96.06 in	600 mm 23.62 in
MSH-CL-DB-274-274 Drop, Module B	2745 mm 108.07 in	2745 mm 108.07 in	600 mm 23.62 in
MSH-CL-DC-244-244 Drop, Module C	2440 mm 96.06 in	2440 mm 96.06 in	400 mm 15.75 in
MSH-CL-DC-274-274 Drop, Module C	2745 mm 108.07 in	2745 mm 108.07 in	400 mm 15.75 in
MSH-CL-DD-244-244 Drop, Module D	2440 mm 96.06 in	2440 mm 96.06 in	400 mm 15.75 in
MSH-CL-DD-274-274 Drop, Module D	2745 mm 108.07 in	2745 mm 108.07 in	400 mm 15.75 in


Configurations - Drop

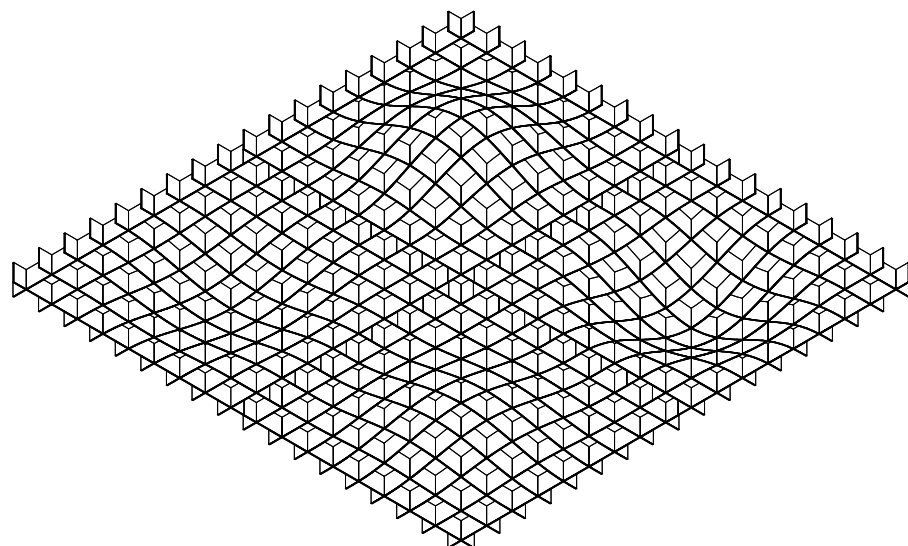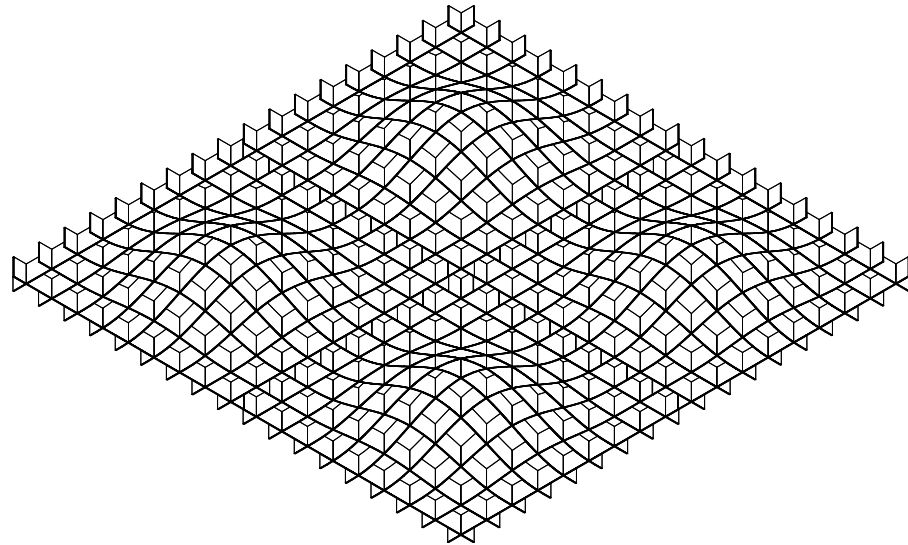

Dimensions - Storm

Modules can be connected together to create a continuous ceiling feature.

* Custom shape and size available.


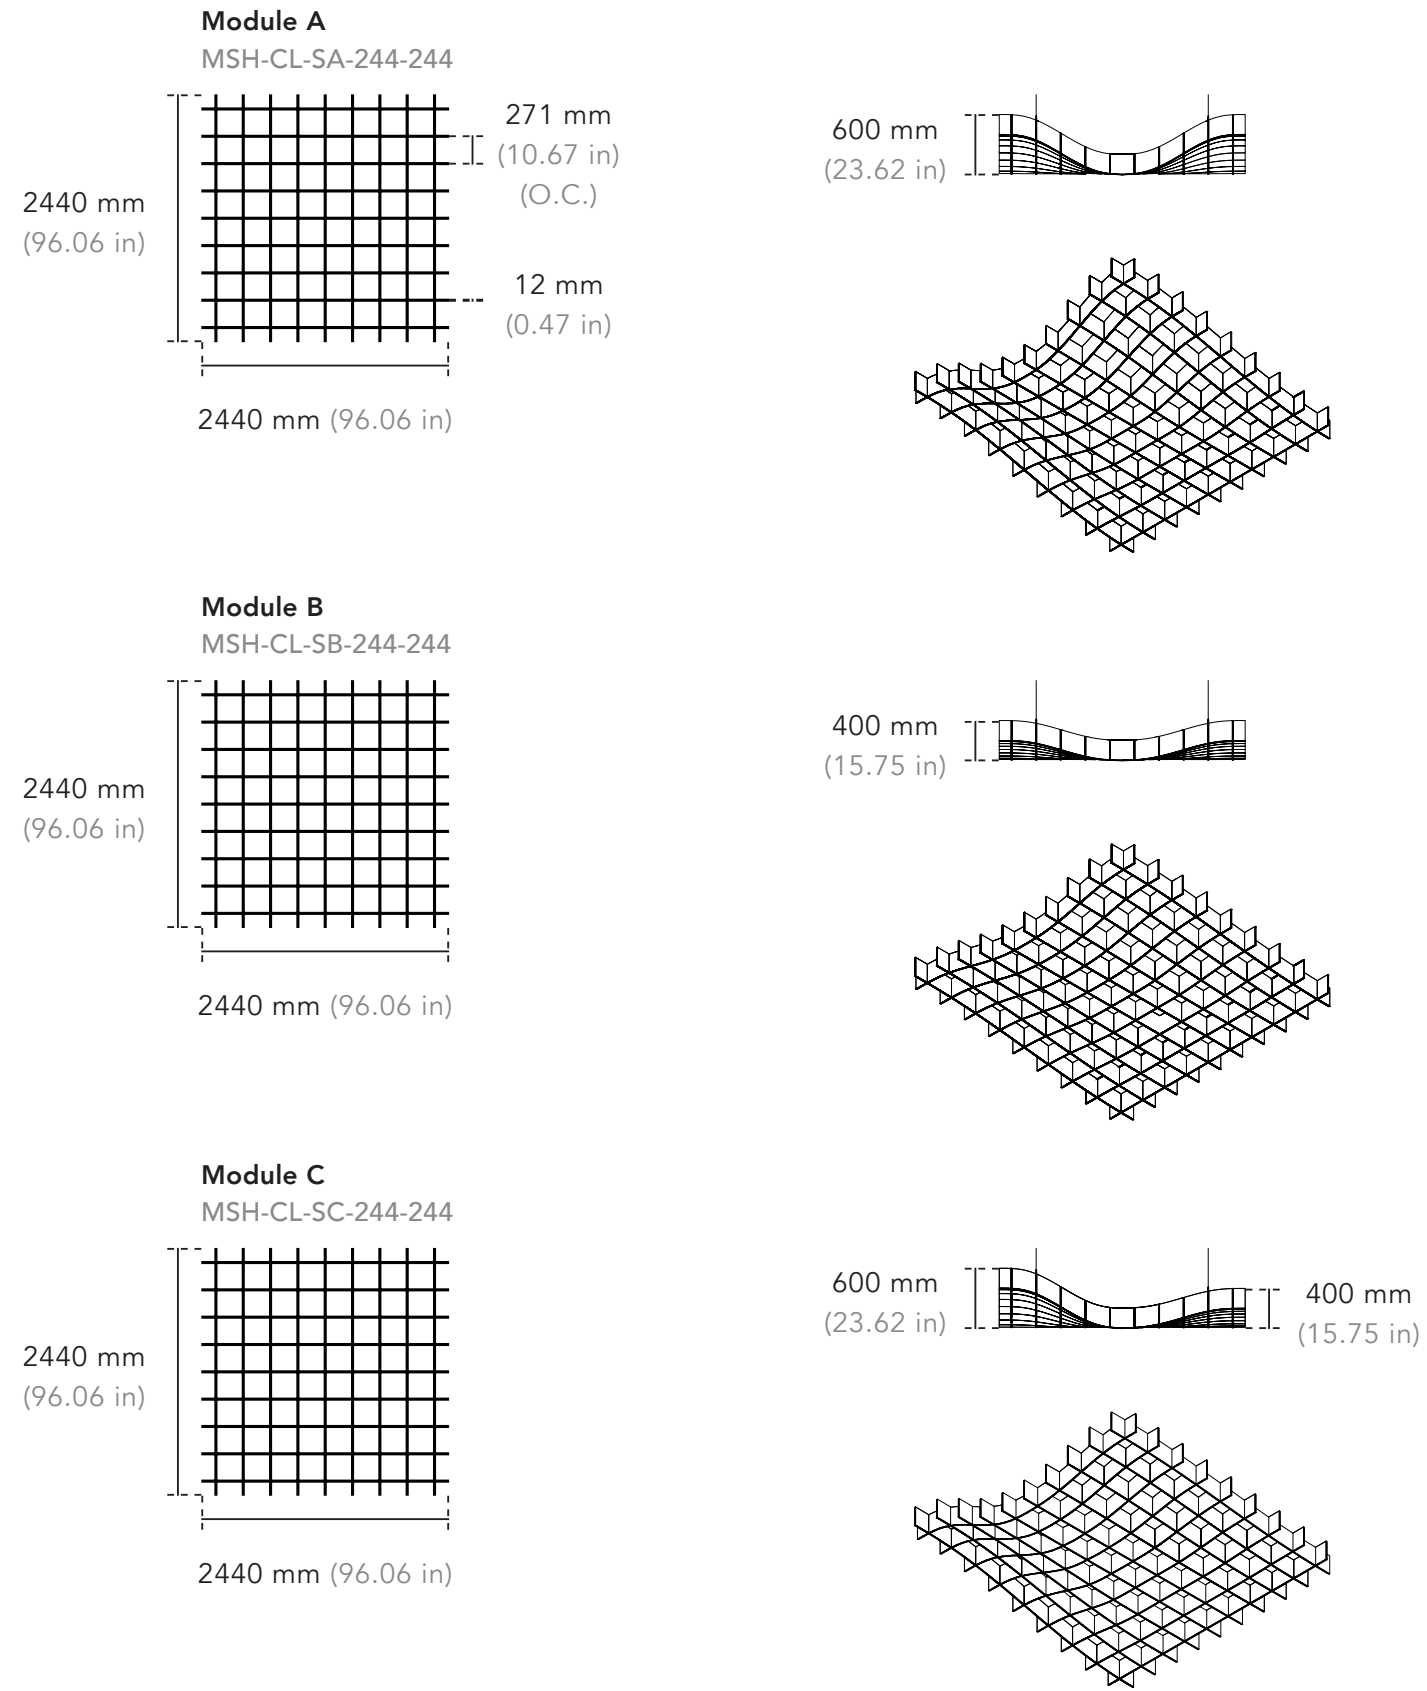




Product Data

Product Code	Width	Length	Height
MSH-CL-SA-244-244 Storm, Module A	2440 mm 96.06 in	2440 mm 96.06 in	600 mm 23.62 in
MSH-CL-SA-274-274 Storm, Module A	2745 mm 108.07 in	2745 mm 108.07 in	600 mm 23.62 in
MSH-CL-SB-244-244 Storm, Module B	2440 mm 96.06 in	2440 mm 96.06 in	400 mm 15.75 in
MSH-CL-SB-274-274 Storm, Module B	2745 mm 108.07 in	2745 mm 108.07 in	400 mm 15.75 in
MSH-CL-SC-244-244 Storm, Module C	2440 mm 96.06 in	2440 mm 96.06 in	600 mm 23.62 in
MSH-CL-SC-274-274 Storm, Module C	2745 mm 108.07 in	2745 mm 108.07 in	600 mm 23.62 in

Configurations - Storm

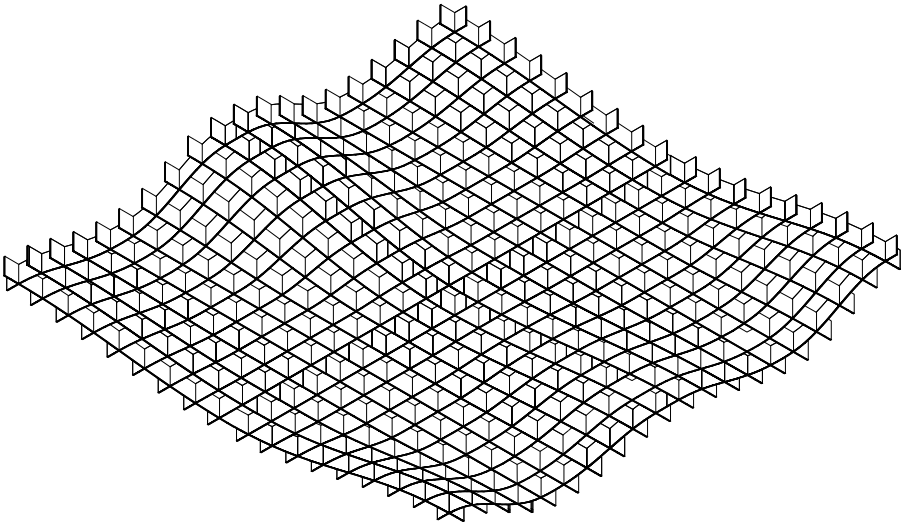





Product Data

Product Code	Width	Length	Height
MSH-CL-WA-244-244 Wave, Module A	2440 mm 96.06 in	2440 mm 96.06 in	600 mm 23.62 in
MSH-CL-WA-274-274 Wave, Module A	2745 mm 108.07 in	2745 mm 108.07 in	600 mm 23.62 in
MSH-CL-WB-244-244 Wave, Module B	2440 mm 96.06 in	2440 mm 96.06 in	600 mm 23.62 in
MSH-CL-WB-274-274 Wave, Module B	2745 mm 108.07 in	2745 mm 108.07 in	600 mm 23.62 in

Configurations - Wave

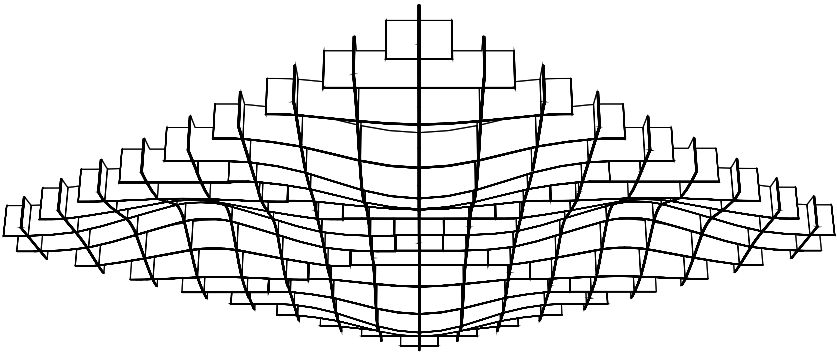


Specifications

Product Name	Mesh Clouds
Composition	100% polyester fibre
Edge Detail	Square edge
Fire Rating	- ASTM E84 Class A - CAN/ULC-S102.2-10
VOC Emissions	CDPH (CA 01350)
Antimicrobial Testing	Mould & mildew resistant
Sustainability	100% recyclable - LBC Red List free - Contributes to LEED certification - Free of toxic substances and of off-gassing - Made with ~60% recycled content from plastic water bottles
How to Specify	- Product Name & Code - Dimensions - Colour - Installation Method
Colour & Texture Variations	The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.



Acoustic Properties



The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a using Type J mounting.

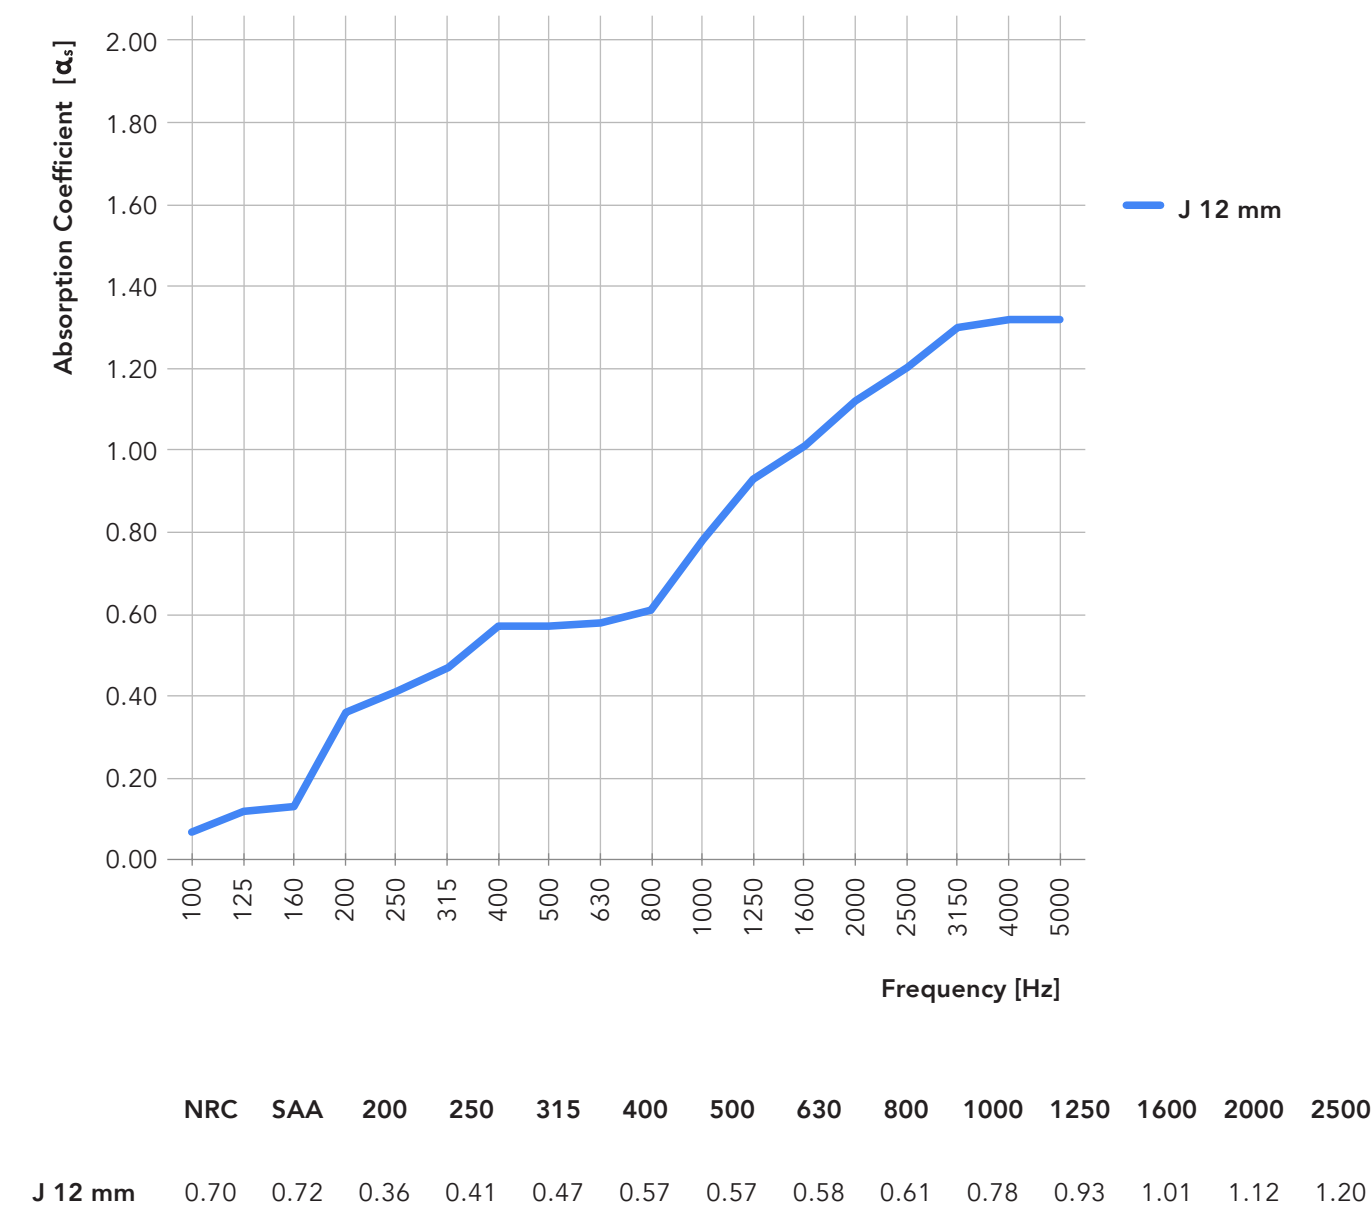

Installation - Twin Panel Clamp Kit (KT-TWCL-00)


Specify optional ceiling hardware at the time of ordering.

Ceiling Hardware Options

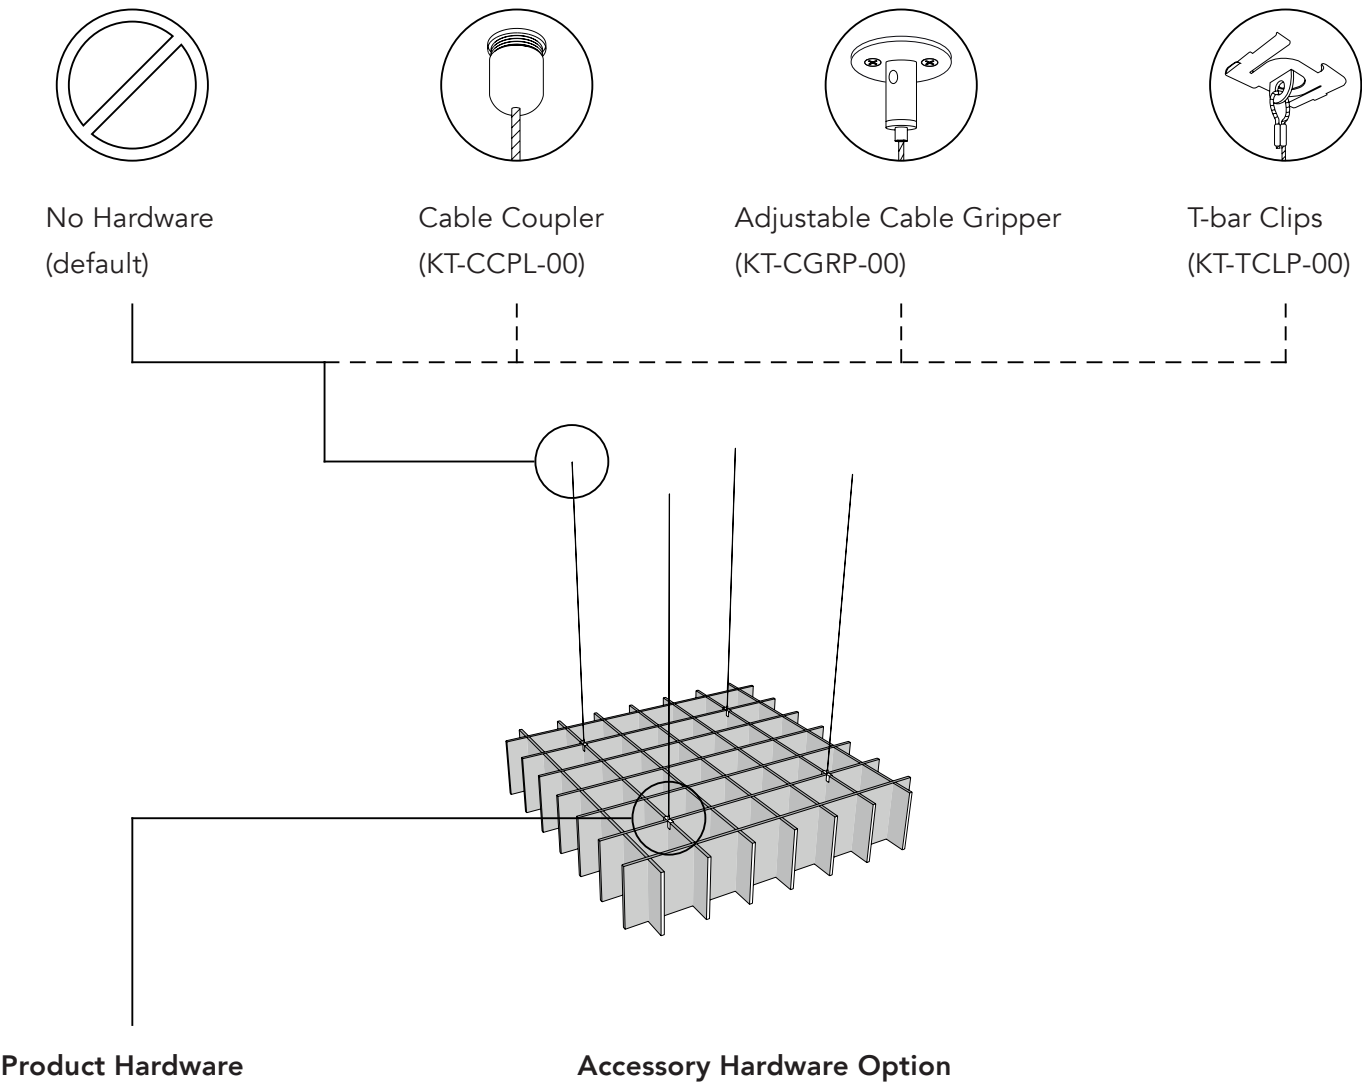

Twin Panel Clamp with
Adjustable Cable Gripper

- Standard silver metal finish



Twin Panel Clamp
(HW-TWCL-00)

- Connects multiple clouds

Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight and the elements.

Maintenance













Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.



Colours

 Pure White SP 07	 Krypton SP 30	 Urban Grey SP 79	 Pumice SP 11	 Warm Grey SP 76	 Cool Grey SP 36
 Ivory SP 77	 Beige SP 04	 NEW Castlerock SP 80	 Mid Grey SP 37	 Graphite SP 03	 Black SP 13
 Sandstone SP 12	 Orange SP 46	 Yam SP 28	 Wild Currant SP 48	 Plum SP 72	 Red SP 08
 Sunflower SP 05	 Chartreuse SP 43	 Desert Sage SP 78	 NEW Peacock SP 82	 Forest Green SP 17	 Dark Turquoise SP 71
 Aquamarine SP 73	 Pale Teal SP 74	 Sky Blue SP 25	 Navy SP 01	 Midnight Blue SP 19	