

Fab Hush

INSTALLATION GUIDE




FAB HUSH INSTALLATION GUIDE

INTRODUCTION

This installation guide provides general instructions meant to aid the installer in applying AKUSTUS products. Installers must rely on their professional experience and their assessment of the project environment to ensure a successful installation.

Upon delivery, examine the products for any damage that may have been caused in transit. If there are any issues, please contact your local distributor immediately. Claims will not be accepted after installation has begun.

COMPONENTS

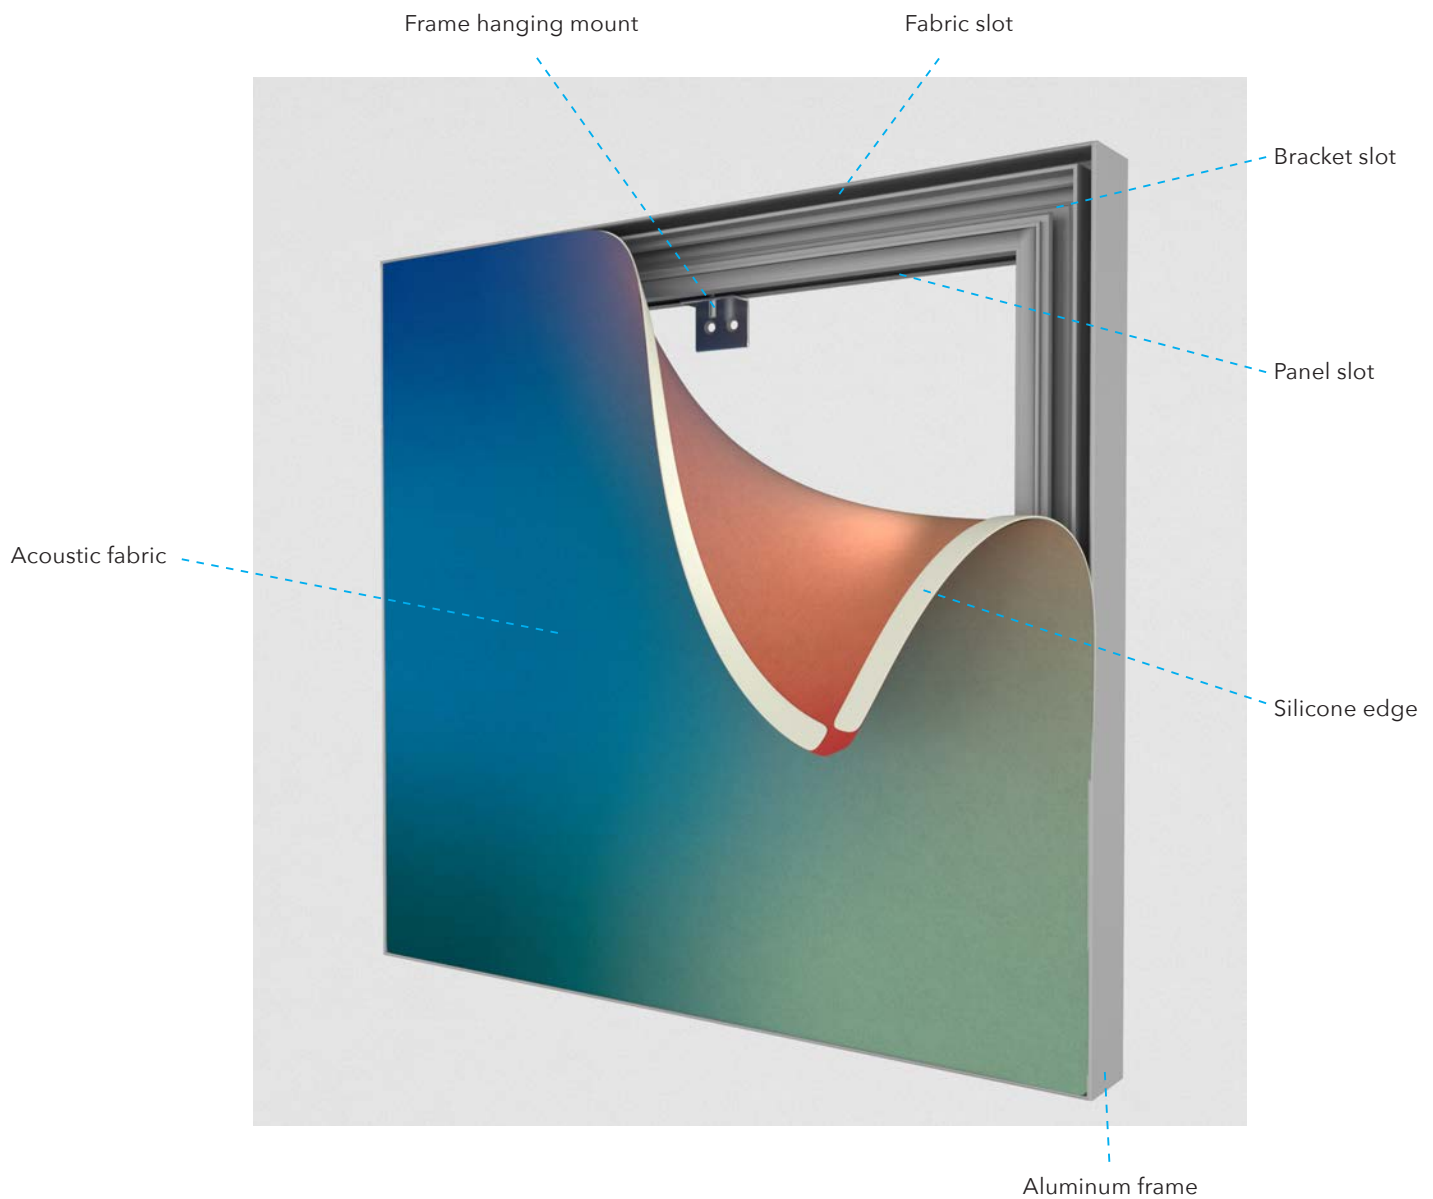

INSTALLATION

STEP 1

Assemble the frame by inserting corner brackets into the ends of the profiles and by pressing the profiles together.

- For the final side of the frame to be assembled, insert the remaining two brackets into both ends of the profile to form a piece resembling a C. Insert this final piece into the rest of the frame.

STEP 2

Tighten the brackets to the frame with the screws provided.

- Make sure to do this only after having ensured that the frame is straight.

STEP 3

Press the acoustic panel into the inner slot of the frame.

- Make sure that all tabs on the panel are secure within the slot.

STEP 4

Press the silicone edges of the acoustic fabric into the slots on the front of the frame.

- It is recommended to press the silicone edge into all four corners of the frame before finishing a side to avoid inserting too much of the fabric into one side.

STEP 5

Install the frame hanging mounts onto the wall with the appropriate screws.

STEP 6

Hang the assembled frame onto the frame mounts on the wall.