

Square Wall Panels




Square Wall Panels are the pixels of wall coverings: the basic unit by which wonderful wall compositions are created. In an auditorium or in a gymnasium, mount these panels to absorb unnecessary reverb and augment the visual appeal of the room.




How to Specify


Step by step instructions on how to specify Square Wall Panels.

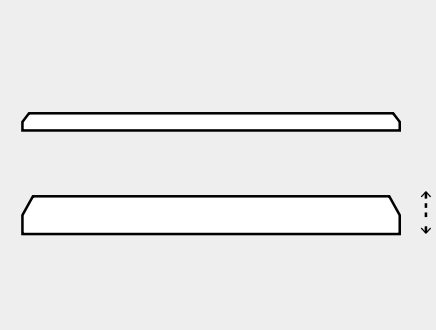


01
Choose thickness.
(pg 03)



02
Choose panel size.
(pg 03)



03
Choose colour.
(pg 04)

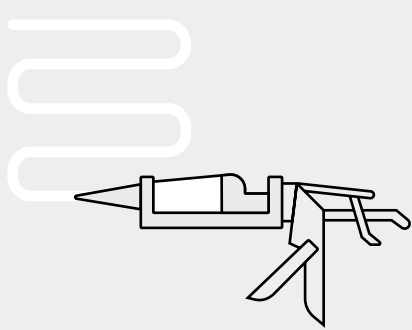

04
Choose installation
method.
(pg 05)

Dimensions

Standard Dimensions (mm)

300 W x 300 H

600 W x 600 H

Standard Thicknesses (mm)

12, 18, 24

Edge Detail



Bevel Edge




Square Edge (Optional)

Customization

Width and Height can be customized to fit your space.


Small

300 mm (11.8 in)



Large

600 mm (23.6 in)

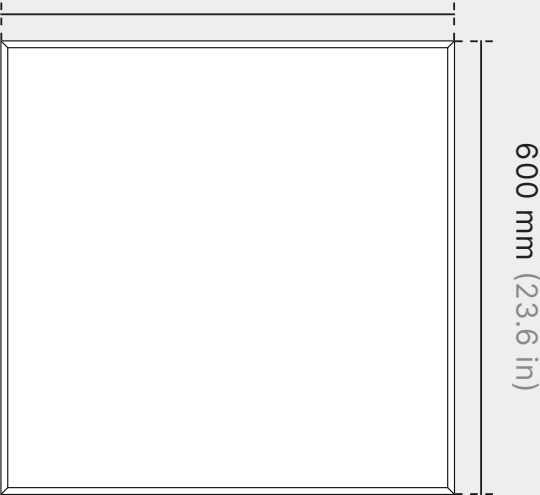










Standard Colours

Choose from any one of our standard colours.

Don't see something you love? Ask us about creating your own custom colour.

* Available in 12 / 24 mm only.
All other colours available in 9, 12, 18, and 24 mm.




SQUARE				WALL PANELS				AKUSTUS.COM
								
Pure White SP 07	Urban Grey SP 79	Pumice SP 11	Warm Grey SP 76	Cool Grey SP 36	Mid Grey SP 37	Graphite SP 03	Black SP 13	
								
Ivory SP 77	Almond SP 91	Beige SP 04	Sandstone SP 12	Taupe Grey SP 90	Castlerock* SP 80	Yam SP 28	Tangerine* SP 92	
								
Sunflower SP 05	Mustard* SP 87	Orange SP 46	Scarlet* SP 93	Blush Pink SP 81	Red SP 08	Plum SP 72	Purple SP 50	
								
Pistachio* SP 95	Chartreuse SP 43	Olive* SP 88	Moss* SP 89	Desert Sage SP 78	Peacock SP 82	Ocean Green* SP 86	Forest Green SP 17	
								
Aquamarine SP 73	Pale Teal SP 74	Lagoon* SP 84	Dark Turquoise SP 71	Azure* SP 85	Jordy Blue* SP 94	Sky Blue SP 25	Navy SP 01	
								
Krypton SP 30	Deep Sea Blue* SP 83	Midnight Blue SP 19						


Installation

This is an overview of the available installation methods. Check out our installation guide for more details.


Construction Adhesive

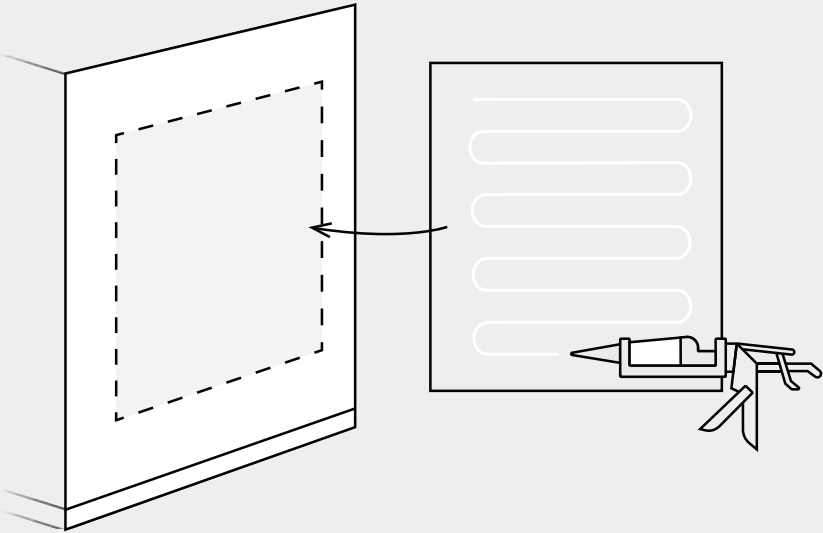


Push Mount Clips

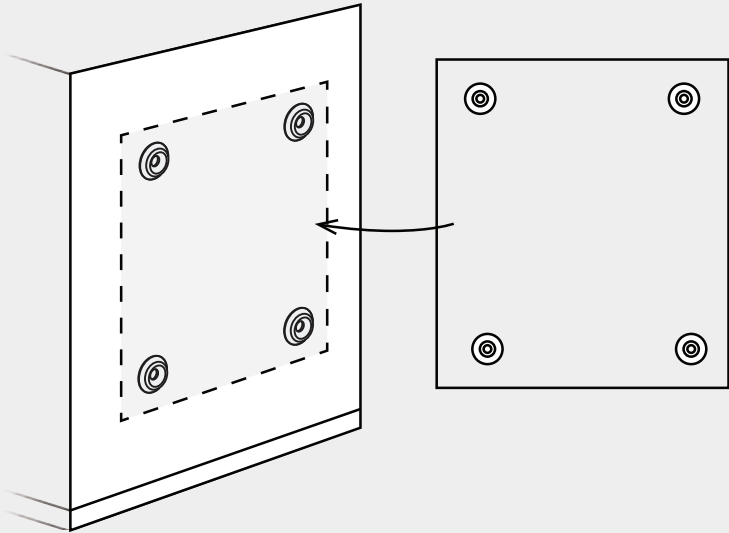

Z-Clips

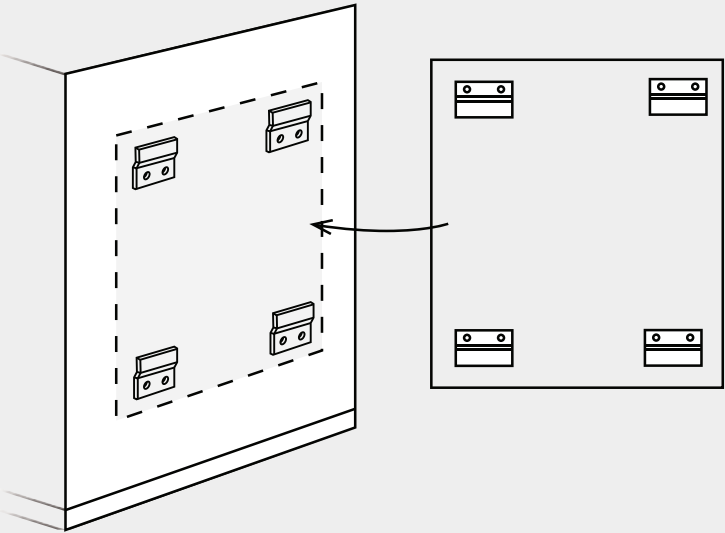

Concealed Mechanical Fasteners

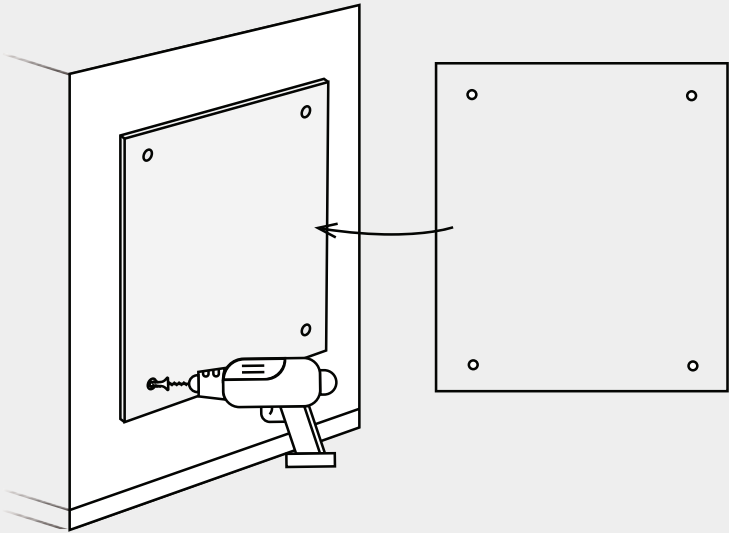

Product Specifications

Square Wall Panels

Composition

100% polyester fibre

Health & Safety

- Fire-rated
 - ASTM E84 Class A
 - CAN/ULC-S102.2-10 compliant
- Low VOCs
 - CDPH v1.2 compliant
- Mould & mildew resistant
 - ASTM C1338 compliant

Colour & Texture Variations

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.


Sustainability

- 100% recyclable
- Made with 60% post consumer recycled content
- Declare Red List free
- Contributes to LEED certification
- Environmental Product Declaration



Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

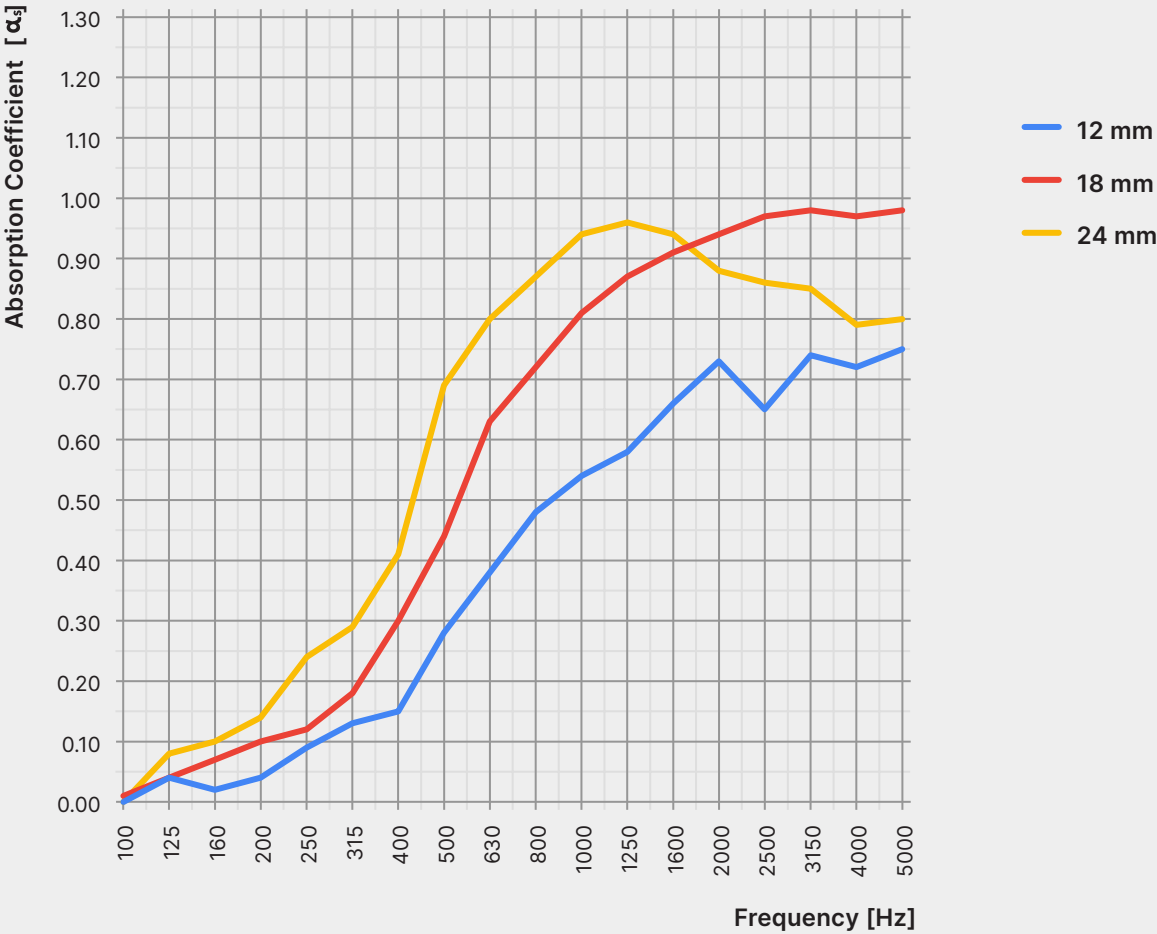

	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	NRC	SAA
12 mm	0.04	0.09	0.13	0.15	0.28	0.38	0.48	0.54	0.58	0.66	0.73	0.65	0.40	0.39
18 mm	0.10	0.12	0.18	0.30	0.44	0.63	0.72	0.81	0.87	0.91	0.94	0.97	0.60	0.58
24 mm	0.14	0.24	0.29	0.41	0.69	0.80	0.87	0.94	0.96	0.94	0.88	0.86	0.70	0.67

Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.



Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

