



Fab Hush Wall System

BY AKUSTUS DESIGNS



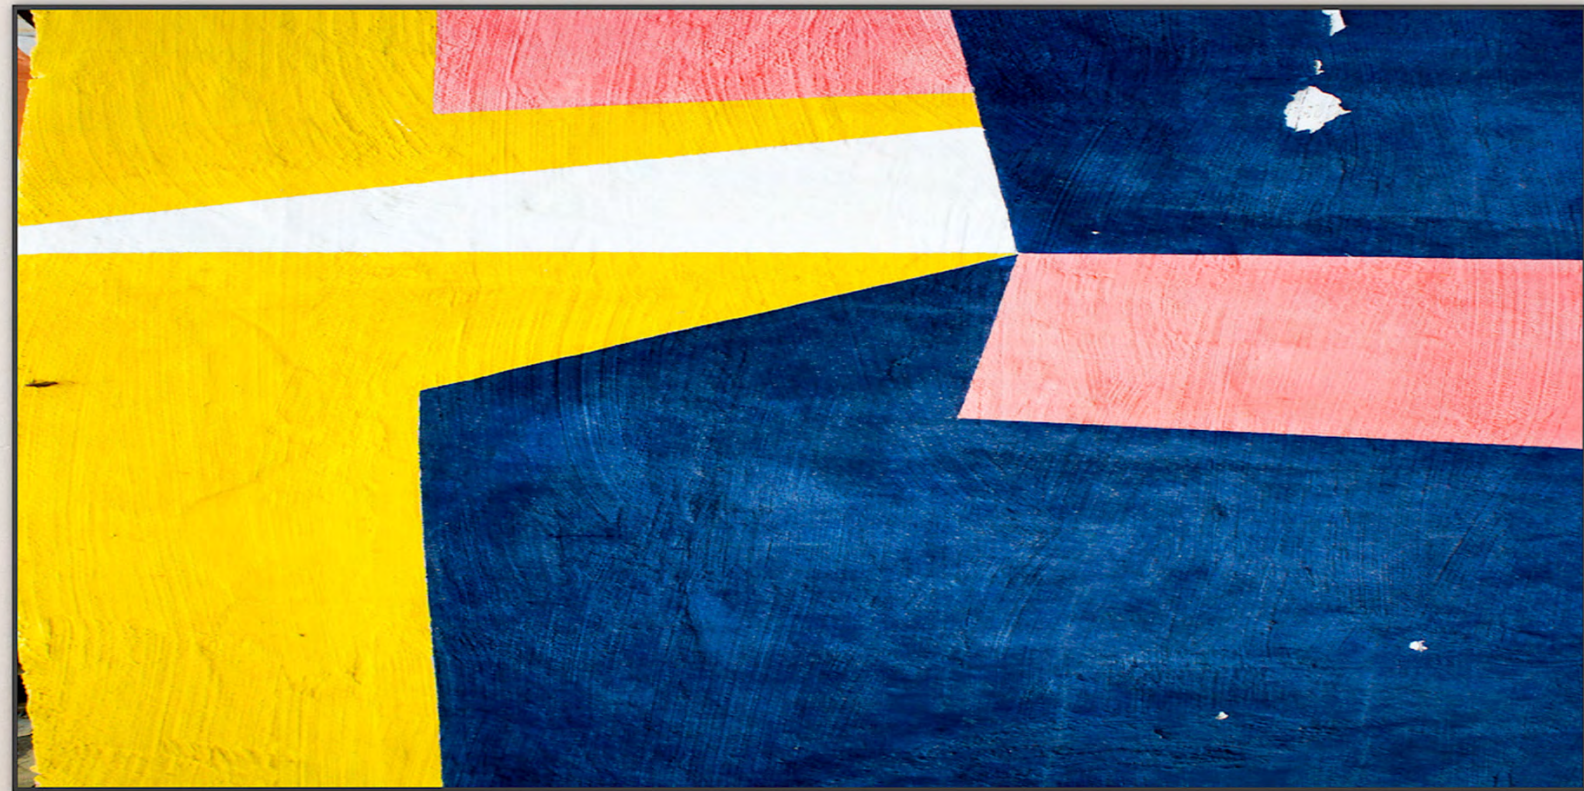

FHS-WS-XXX-XXX

The **Fab Hush Wall System** combines the stunning visuals of textile printing with the acoustic benefits of polyester fibre panels. Our proprietary design offers acoustic absorption ratings higher than the sum of the system's parts. Any image or design can be printed on to the acoustic fabric in vibrant and vivid colours. With a silicone edge guiding the fabric into the frame, the prints are not only easy to install but also easy to change. For retail, hospitality or public spaces, the Fab Hush Wall System provides an effective and efficient way to display visuals and reduce noise.




FHS-WS-XXX-XXX

Dimensions

Available Depth: 27 mm (1.1 in)


* Custom dimensions available with maximum height of 3048 mm (120 in).

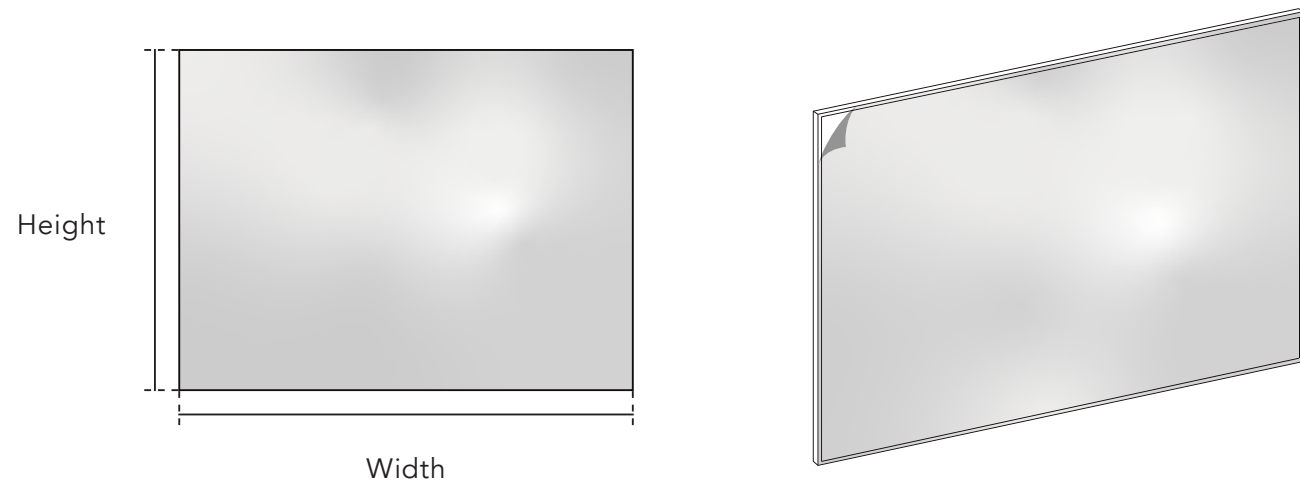

Product Data

Product Code	Width x Height	Depth	Weight
FHS-WS-120-090	1200 x 900 mm 47.2 x 35.4 in	27 mm 1.1 in	5.5 kg 12.1 lb
FHS-WS-180-120	1800 x 1200 mm 70.9 x 47.2 in	27 mm 1.1 in	9.5 kg 20.9 lb
FHS-WS-240-180	2400 x 1800 mm 94.5 x 70.9 in	27 mm 1.1 in	16.5 kg 36.4 lb
FHS-WS-300-240	3000 x 2400 mm 118.1 x 94.5 in	27 mm 1.1 in	25.3 kg 55.8 lb
FHS-WS-450-300	4500 x 3000 mm 177.2 x 118.1 in	27 mm 1.1 in	43.9 kg 96.8 lb


Assembly

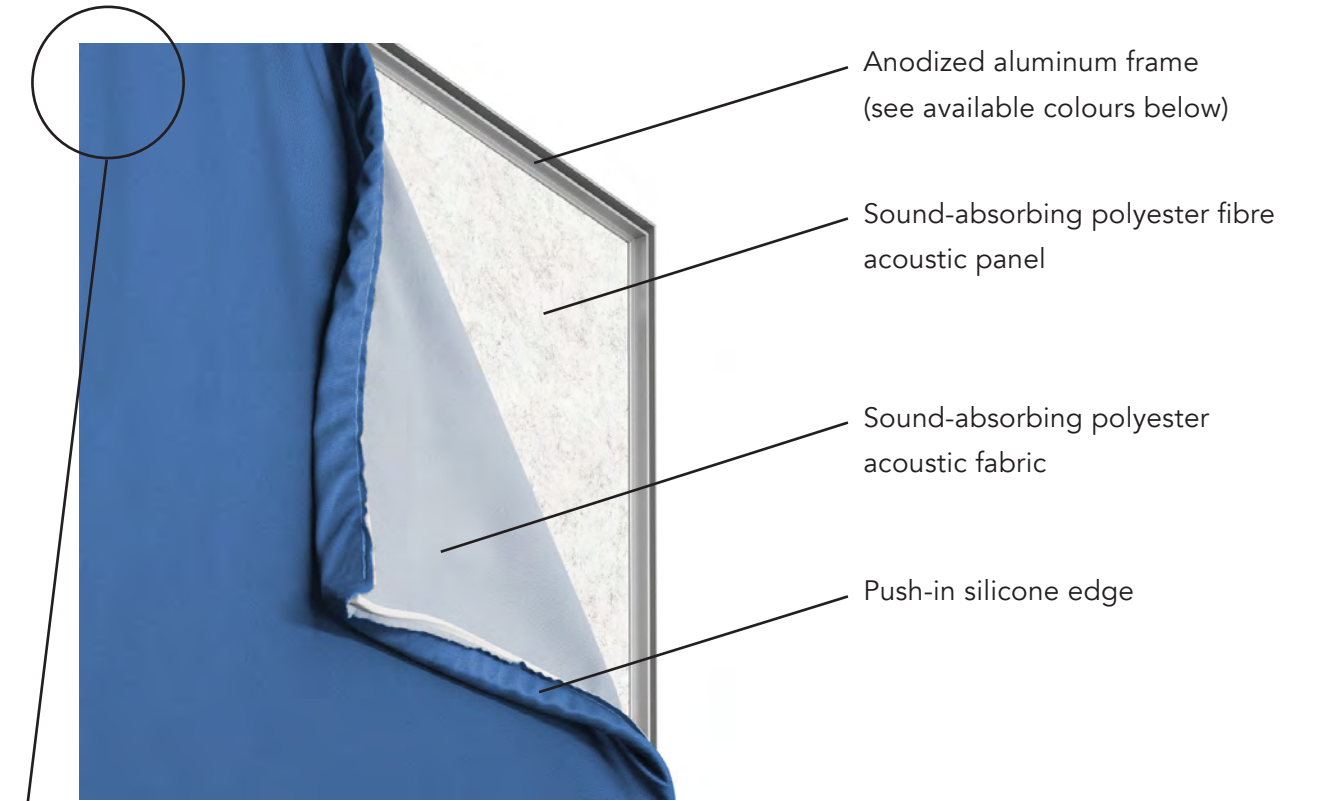

Frame Corner Detail



Frame Colours

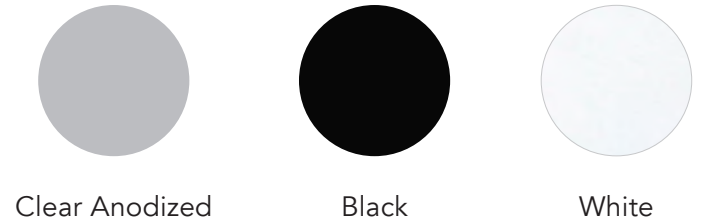


Specifications

Product Name	Fab Hush Wall System
Composition	<p>Frame</p> <ul style="list-style-type: none"> Anodized aluminum frame <p>Fabric</p> <ul style="list-style-type: none"> Sound-absorbing polyester acoustic fabric with push-in silicone edge <p>Core</p> <ul style="list-style-type: none"> Sound-absorbing polyester fibre acoustic panel
Fire Rating	<p>Core</p> <ul style="list-style-type: none"> ASTM E84 Class A CAN/ULC-S102.2-10
VOC Emissions	<p>Core</p> <ul style="list-style-type: none"> CDPH (CA 01350)
Antimicrobial Testing	<p>Core</p> <ul style="list-style-type: none"> Mould & mildew resistant
Sustainability	<p>Frame</p> <ul style="list-style-type: none"> 100% recyclable Long service life <p>Core</p> <ul style="list-style-type: none"> 100% recyclable LBC Red List free Contributes to LEED certification Free of toxic substances and of off-gassing Made with ~60% recycled content from plastic water bottles
How to Specify	<ul style="list-style-type: none"> Product Name & Code Dimensions Print Frame Colour



Acoustic Properties



The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a using Type A mounting.

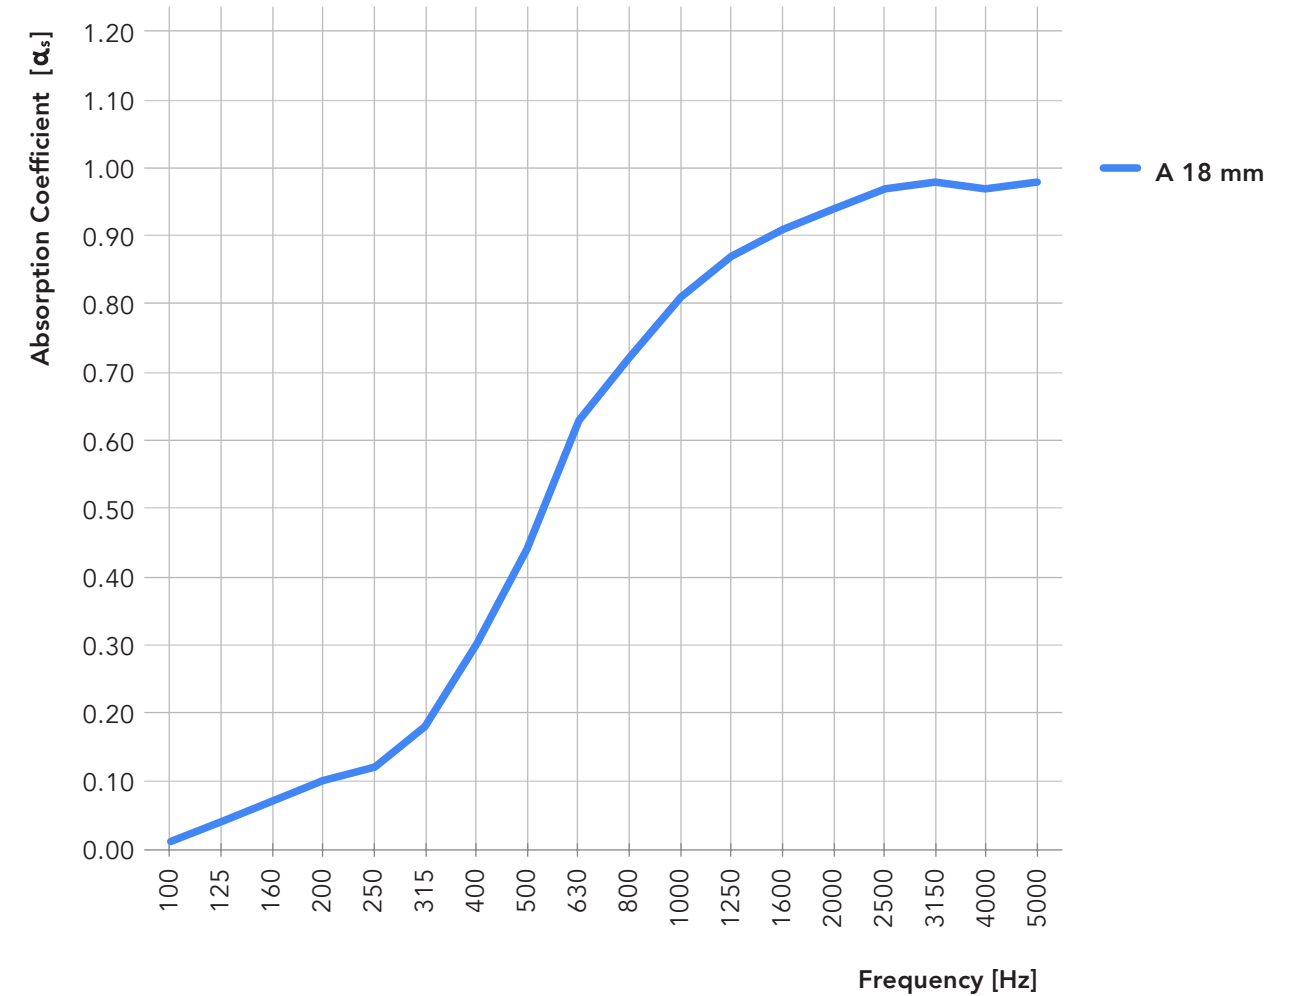

	NRC	SAA	200	250	315	400	500	630	800	1000	1250	1600	2000	2500
A 18 mm	0.60	0.58	0.10	0.12	0.18	0.30	0.44	0.63	0.72	0.81	0.87	0.91	0.94	0.97

Installation

Frame Mounts (KT-FRME-00)

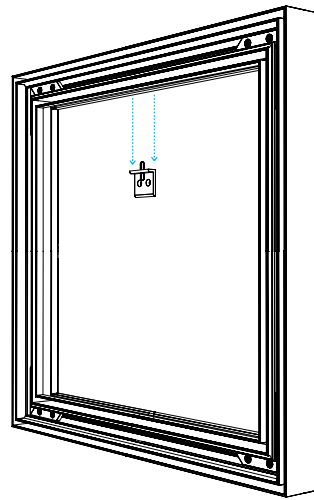

- Hook height adjustable

Product Care

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

